

NPDES Permit No. IL0077259
Notice No. LRL:07103101.docx

Public Notice Beginning Date: **May 19, 2015**

Public Notice Ending Date: **June 18, 2015**

National Pollutant Discharge Elimination System (NPDES)
Permit Program

Draft Modified NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By:

Illinois Environmental Protection Agency
Bureau of Water
Division of Water Pollution Control
Permit Section
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276
217/782-0610

Name and Address of Discharger:

Tazewell County Landfill, Inc.
4700 North Sterling Avenue
Peoria, Illinois 61615

Name and Address of Facility:

Indian Creek Landfill No. 2
24501 McMullen Road
Hopedale, Illinois 61747
(Tazewell County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue a NPDES permit to discharge into the waters of the state and has prepared a draft permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. The last day comments will be received will be on the Public Notice period ending date unless a commentor demonstrating the need for additional time requests an extension to this comment period and the request is granted by the IEPA. Interested persons are invited to submit written comments on the draft permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. Persons submitting comments and/or requests for public hearing shall also send a copy of such comments or requests to the permit applicant. The NPDES permit and notice number(s) must appear on each comment page.

The application, engineer's review notes including load limit calculations, Public Notice/Fact Sheet, draft permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

If written comments or requests indicate a significant degree of public interest in the draft permit, the permitting authority may, at its discretion, hold a public hearing. Public notice will be given 45 days before any public hearing. Response to comments will be provided when the final permit is issued. For further information, please call Leslie Lowry at 217/782-0610.

The applicant is engaged in the operation of a non-hazardous municipal solid waste landfill (SIC 4953). Waste water is generated from precipitation which comes into contact with final and intermediate covers and is considered non-contaminated stormwater. Any precipitation that does come into contact with waste is collected by the landfills leachate collection system and is either recirculated, solidified on-site, or hauled off-site for treatment. Plant operation results in an intermittent discharge of stormwater from outfall 001, an intermittent discharge of stormwater from outfall 002, and an intermittent discharge of sediment trap 1 stormwater runoff from outfall 003, and an intermittent discharge of sediment trap 2 stormwater runoff from outfall 004.

The following modification is proposed:

The addition of outfall 003, sediment trap 1 stormwater runoff, and outfall 004, sediment trap 2 stormwater runoff.

Application is made for existing discharges which are located in Tazewell County, Illinois. The following information identifies the discharge point, receiving stream and stream classifications:

<u>Outfall</u>	<u>Receiving Stream</u>	<u>Latitude</u>		<u>Longitude</u>		<u>Stream Classification</u>	<u>Integrity Rating</u>
001	Unnamed Tributary to Indian Creek	40° 25' 22"	North	89° 28' 02"	West	General Use	Not Rated
002	Unnamed Tributary to Indian Creek	40° 24' 39"	North	89° 27' 48"	West	General Use	Not Rated
003	Unnamed Tributary to Indian Creek	40° 25' 08"	North	89° 27' 28"	West	General Use	Not Rated
004	Unnamed Tributary to Indian Creek	40° 25' 11"	North	89° 27' 37"	West	General Use	Not Rated

To assist you further in identifying the location of the discharge please see the attached map.


The stream segment receiving the discharge from outfalls 001, 002, 003, and 004 are not on the draft 2014 303(d) list of impaired waters and is not a biologically significant stream on the 2008 Illinois Department of Natural Resources Publication – *Integrating Multiple Taxa in a Biological Stream Rating System*.

The discharges from the facility shall be monitored and limited at all times as follows:

PARAMETER	LOAD LIMITS lbs/day <u>DAF (DMF)</u>		REGULATION	CONCENTRATION <u>LIMITS mg/l</u>		REGULATION
	30 DAY AVERAGE	DAILY MAXIMUM		30 DAY AVERAGE	DAILY MAXIMUM	
<u>Outfall 001:</u>						
Flow (MGD)						
SWPPP						
<u>Outfall 002:</u>						
Flow (MGD)						
SWPPP						
<u>Outfall 003:</u>						
SWPPP						
<u>Outfall 004:</u>						
SWPPP						

The following explain the conditions of the proposed permit:

The special conditions clarify the following, flow, stormwater pollution prevention plan, monitoring location, algicide usage, biosolids and bioremediated soil usage requirements, and compliance with the Bureau of Land.

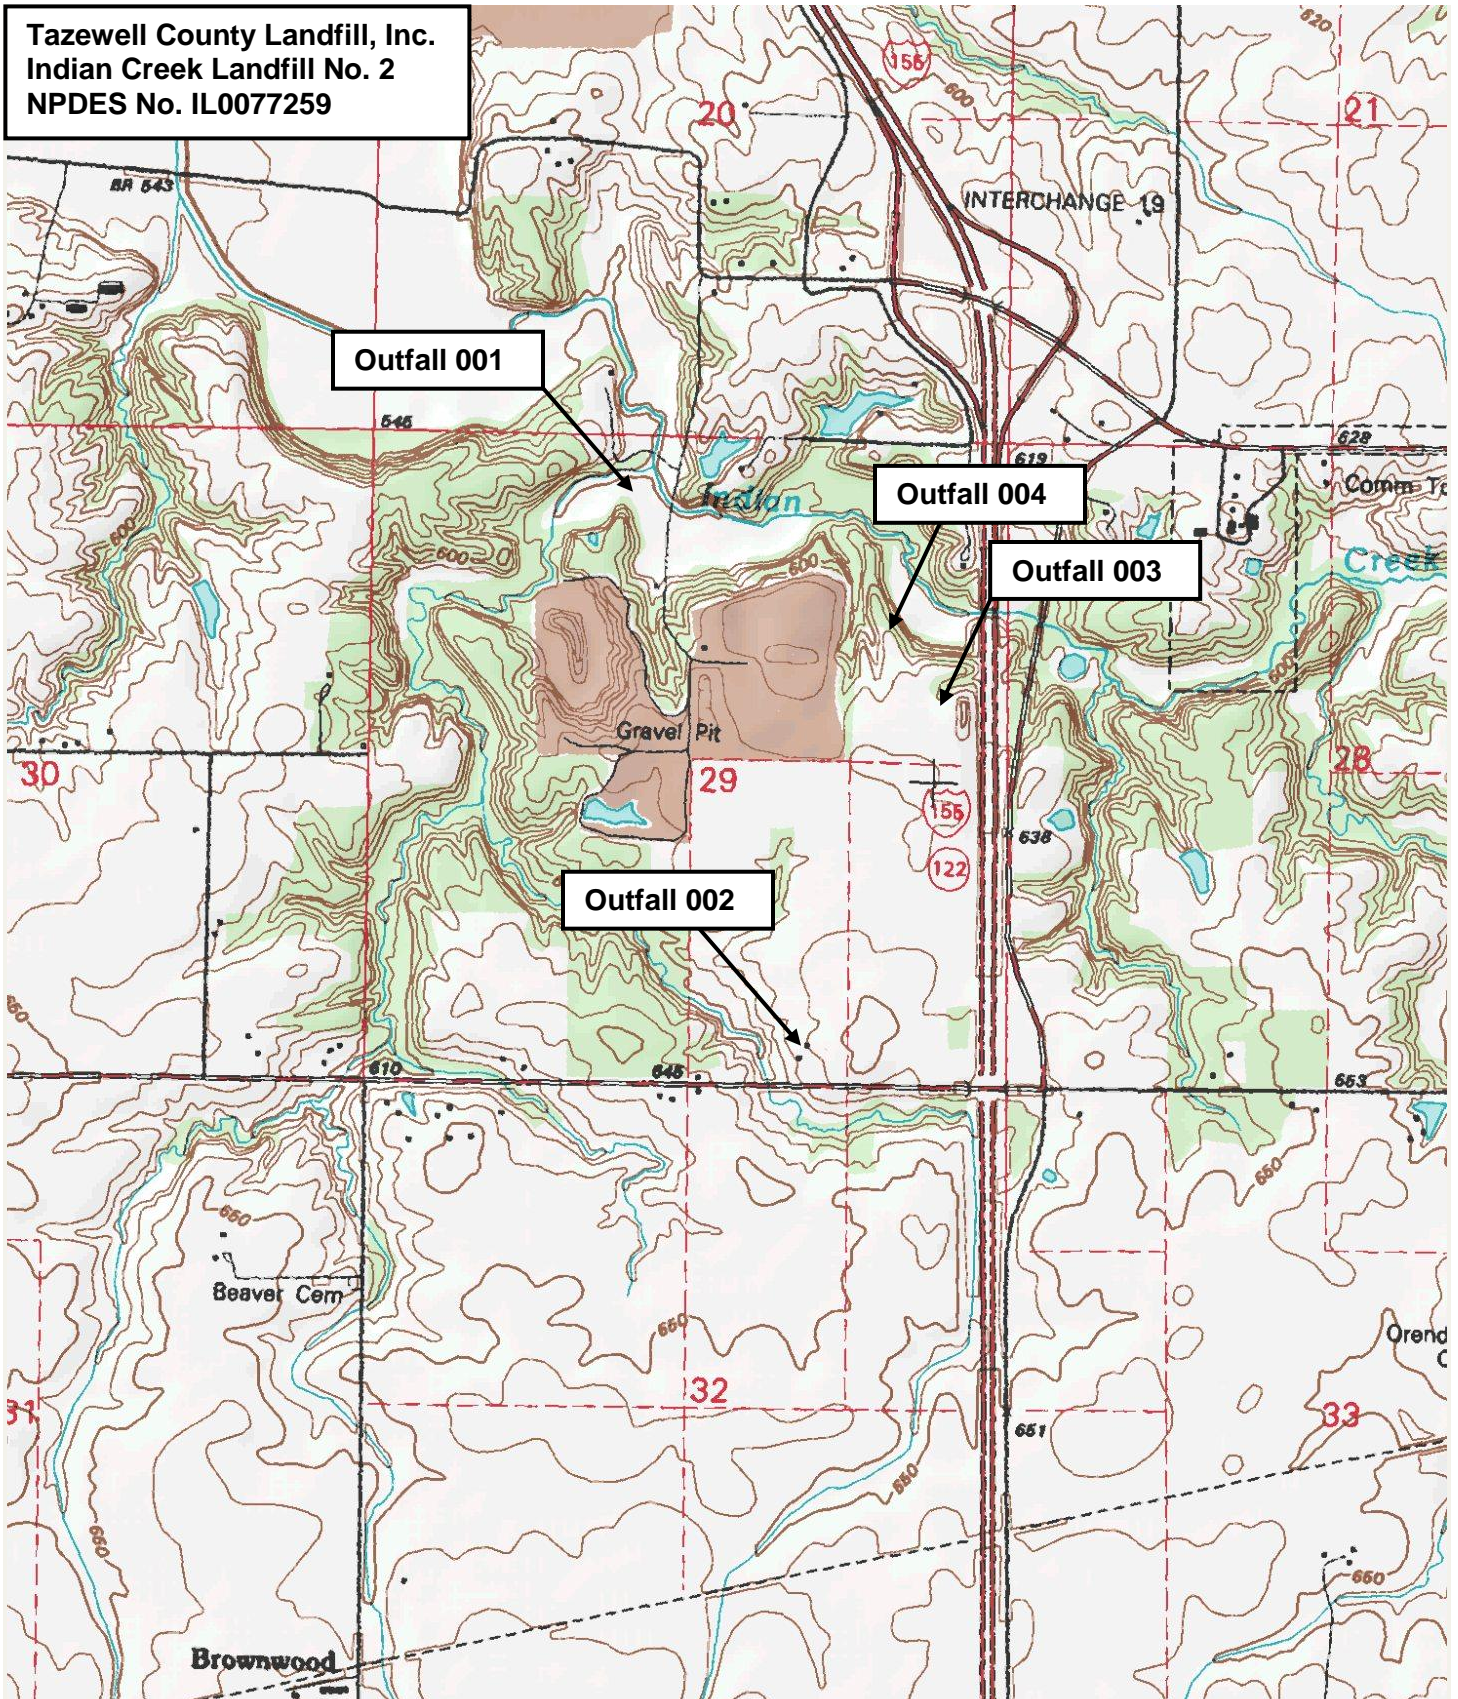

NPDES Permit No. IL0077259

Illinois Environmental Protection Agency

Division of Water Pollution Control

1021 North Grand Avenue East

Post Office Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Modified (NPDES) Permit

Expiration Date: October 31, 2016

Issue Date: November 8, 2011

Effective Date: December 1, 2011

Modification Date:

Name and Address of Permittee:

Tazewell County Landfill, Inc.
4700 North Sterling Avenue
Peoria, Illinois 61615

Facility Name and Address:

Indian Creek Landfill No. 2
24501 McMullen Road
Hopedale, Illinois 61747
(Tazewell County)

Discharge Number and Name:

001 Stormwater
002 Stormwater
003 Sediment Trap 1 Stormwater Runoff
004 Sediment Trap 2 Stormwater Runoff

Receiving Waters:

Unnamed Tributary to Indian Creek
Unnamed Tributary to Indian Creek
Unnamed Tributary to Indian Creek
Unnamed Tributary to Indian Creek

In compliance with the provisions of the Illinois Environmental Protection Act, Title 35 of Ill. Adm. Code, Subtitle C and/or Subtitle D, Chapter 1, and the Clean Water Act (CWA), the above-named permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the standard conditions and attachments herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Alan Keller, P.E.
Manager, Permit Section
Division of Water Pollution Control

SAK:LRL:07103101.docx

NPDES Permit No. IL0077259

Effluent Limitations and Monitoring

1. From the modification date of this permit until the expiration date, the effluent of the following discharges shall be monitored and limited at all times as follows:

PARAMETER	LOAD LIMITS lbs/day <u>DAF (DMF)</u>		CONCENTRATION <u>LIMITS mg/l</u>		SAMPLE FREQUENCY	SAMPLE TYPE
	30 DAY AVERAGE	DAILY MAXIMUM	30 DAY AVERAGE	DAILY MAXIMUM		
<u>Outfall 001 – Stormwater*</u> (Intermittent Discharge)						
Flow (MGD)	See Special Condition 8.				Daily When Discharging	Measure
* - See Special Condition 1.						
<u>Outfall 002 – Stormwater*</u> (Intermittent Discharge)						
Flow (MGD)	See Special Condition 8.				Daily When Discharging	Measure
* - See Special Condition 1.						
<u>Outfall 003 – Sediment Trap 1 Stormwater Runoff*</u> (Intermittent Discharge)						
* - See Special Condition 10.						
<u>Outfall 004 – Sediment Trap 2 Stormwater Runoff*</u> (Intermittent Discharge)						
* - See Special Condition 10.						

Special ConditionsSPECIAL CONDITION 1.A. STORM WATER POLLUTION PREVENTION PLAN (SWPPP) for Outfalls 001 and 002

1. General storm water pollution prevention plan requirements applicable to both landfill activities and landfill construction activities are as follows:
 - a. The stormwater pollution prevention plan (SWPPP) developed for previous permits shall be maintained and if necessary amended by the permittee.
 - b. The owner or operator of a landfill with storm water discharges covered by this permit shall make a copy of the plan available to the Agency at any reasonable time upon request. A copy of the plan shall be maintained at the landfill for which storm water discharges are covered by this permit.
 - c. The permittee may be notified in writing by the Agency, at any time, that the plan does not meet the requirements of this permit. After such notification, the permittee shall make changes to the plan and shall submit a written certification that the requested changes have been made. Unless otherwise provided, the permittee shall have 30 days after such notification to make the changes.
 - d. The discharger shall amend the plan whenever there is a change in construction, operation, or maintenance which affects the discharge quantity of pollutants to waters of the State or if a facility inspection required by paragraph A.1.f. of this Special Condition indicates that an amendment is needed. The plan should also be amended if the discharger is in violation of any conditions of this permit, or has not achieved the general objectives of controlling pollutants in storm water discharges. Amendments to the plan shall be made within the shortest reasonable period of time, and shall be provided to the Agency for review upon request.

In addition to the above requirements, the plan shall be amended if sludge or bioremediated soils are utilized as daily, intermediate or final cover, if spray-on erosion or dust control/daily cover products are utilized, if pond water is utilized for dust control or other means or if additives are utilized to enhance effluent quality. Stormwater runoff from areas where sludge or bioremediated soils are utilized or stockpiled shall be diverted to detention basins when ever possible. Daily cover or approved alternate daily cover shall be utilized on sludge or bioremediated soils to prevent excessive wash out of the solids. Pond water utilized for dust suppression or other means shall be restricted in quantities, locations and time periods to prevent runoff, wash off due to precipitation or tracking on tires due to mud formation. Spray on products or effluent enhancing additives shall be reviewed and approved prior to use. Information that should be provided with a request for approval of effluent enhancing additives shall include but not be limited to the following:

1. MSDS sheets
2. List of active and inactive ingredients
3. Expected dosage rate
4. Expected concentration in the discharge

Information to be provided with a request for approval of spray on products shall include but not be limited to the following;

1. MSDS sheets if available
2. List of compounds comprising the product, especially biocides, and amounts of each compound
3. Area utilized, drainage area tributary outfall and method of application
4. Information, if available, regarding degradation rates
5. Expect stormwater runoff quality

- e. Non-Storm Water Discharges - The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-storm water discharges. The certification shall include a description of any tests for the presence of non-storm water discharges, the methods used, the dates of the testing, and any on-site drainage points that were observed during the testing. Any facility that is unable to provide this certification must describe the procedure of any test conducted for the presence of non-storm water discharges, the test results, potential sources of non-storm water discharges to the storm sewer, and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges shall include but not be limited to those discharges identified as categorical discharges under 40 CFR 445 Landfills Point Source Category.
- f. The permittee shall conduct facility inspections to verify that all elements of the plan, including the site map, potential pollutant sources, and structural and non-structural controls to reduce pollutants in landfill storm water discharges are accurate. Inspections shall be conducted quarterly during or shortly after a significant rain event, but no less than annually if no such significant rain event occurs. Observations that require a response and the appropriate response to the observation shall be retained as part of the plan. Records documenting observations made during the site inspection shall be submitted to the Agency in accordance with the reporting requirements of this permit.
- g. The plan should briefly describe the appropriate elements of other program requirements, including Spill Prevention Control

Special Conditions

degree attainable. The installation of these devices may be subject to Section 404 of the CWA.

- ii. **Storm Water Management.** A description of measures that will be installed during the construction process to control pollutants in storm water discharges that will occur after construction operations have been completed. Structural measures should be placed on upland soils to the degree attainable. The installation of these devices may be subject to Section 404 of the CWA. This permit only addresses the installation of storm water management measures, and not the ultimate operation and maintenance of such structures after the construction activities have been completed and the site has undergone final stabilization. Permittees are responsible for only the installation and maintenance of storm water management measures prior to final stabilization of the site, and are not responsible for maintenance after storm water discharges associated with landfill construction have been eliminated from the site.
 - (A). Such practices may include: storm water detention structures (including wet ponds); storm water retention structures; flow attenuation by use of open vegetated swales and natural depressions; infiltration of runoff on-site; and sequential systems (which combine several practices). The pollution prevention plan shall include an explanation of the technical basis used to select the practices to control pollution where flows exceed predevelopment levels.
 - (B). Velocity dissipation devices shall be placed at discharge locations and along the length of any outfall channel as necessary to provide a non-erosive velocity flow from the structure to a water course so that the natural physical and biological characteristics and functions are maintained and protected (e.g. maintenance of hydrologic conditions, such as the hydroperiod and hydrodynamics present prior to the initiation of construction activities).
 - iii. **Other Controls.**
 - (A). **Waste Disposal.** No solid materials, including building materials, shall be discharged to Waters of the State, except as authorized by a Section 404 permit.
 - (B). The plan shall ensure and demonstrate compliance with applicable State and/or local waste disposal, sanitary sewer or septic system regulations.
 - iv. **Approved State or Local Plans.** The management practices, controls and other provisions contained in the storm water pollution prevention plan must be at least as protective as the requirements contained in the "Illinois Urban Manual" dated 2002. Facilities which discharge storm water associated with construction site activities must include in their storm water pollution prevention plan any applicable local requirements. Storm water management requirements approved by local officials that are applicable to protecting surface water resources are incorporated by reference and are enforceable under this permit even if they are not specifically included in a storm water pollution prevention plan required under this permit. This provision does not apply to provisions of master plans, comprehensive plans, non-enforceable guidelines or technical guidance documents that are not identified in a specific plan or permit that is issued for the construction site.
 - c. **Maintenance.** A description of procedures to maintain in good and effective operating conditions vegetation, erosion and sediment control measures and other protective measures identified in the site plan.
3. The storm water pollution prevention plan for new and existing storm water discharges associated with active or inactive landfill or open dumps and any on-site ancillary activities that receive or have received any industrial wastes shall include the following items:
 - a. The plan shall provide a description of potential sources which may be expected to add significant quantities of pollutants to storm water discharges, or which may result in non-storm water discharges from the facility. The plan shall include, at a minimum, the following items:
 - i. A topographic map extending one-quarter mile beyond the property boundaries of the facility, showing: the facility, surface water bodies, wells (including injection wells), seepage pits, infiltration ponds, and the discharge points where the facility's storm water discharges to surface waters. The requirements listed in this paragraph may be included on the site map if appropriate.
 - ii. A site map showing:
 - (A). The storm water conveyance and discharge structures;
 - (B). An outline of the storm water drainage areas for each storm water discharge point;
 - (C). Paved areas and buildings;
 - (D). Areas used for outdoor storage, or disposal of significant materials, including activities that generate significant quantities of dust or particulates;

NPDES Permit No. IL0077259

Special Conditions

- (E). Location of existing storm water structural control measures (dikes, coverings, detention facilities, etc.);
 - (F). Surface water locations;
 - (G). Areas of existing and potential soil erosion;
 - (H). Vehicle service and traffic areas;
 - (I). Material loading, unloading, and access areas;
 - (J). Areas that have daily cover, intermediate final cover and final vegetative cover of the landfill;
 - (K). Areas that are considered ancillary operations of a landfill.
- iii. A narrative description of the following:
- (A). The nature of the landfill activities conducted at the site, including a description of significant materials that are treated, stored or disposed of in a manner to allow exposure to storm water;
 - (B). Materials, equipment, and vehicle management practices employed to minimize contact of significant materials with storm water discharges;
 - (C). Existing structural and non-structural control measures to reduce pollutants in storm water discharges;
 - (D). Landfill storm water discharge treatment facilities;
 - (E). Methods of on-site storage and disposal of significant materials.
- iv. A list of the types of pollutants found present by required testing, either by this permit or application requirements.
- v. An estimate of the size of the facility in acres or square feet, and the percent of the facility that has impervious areas such as pavement or buildings.
- vi. A summary of existing sampling data describing pollutants in storm water discharges from the landfill or ancillary activities.
- b. The plan shall describe the storm water management controls which will be implemented by the facility. The appropriate controls shall reflect identified existing and potential sources of pollutants at the facility. The description of the storm water management controls shall include:
- i. Storm Water Pollution Prevention Personnel - Identification by job titles of the individuals who are responsible for developing, implementing, and revising the plan.
 - ii. Preventive Maintenance - Procedures for inspection and maintenance of storm water conveyance system and devices such as oil/water separators, catch basins, etc., and inspection and testing of plant equipment and systems that could fail and result in discharges of pollutants to storm water.
 - iii. Good Housekeeping - Good housekeeping requires the maintenance of clean, orderly facility areas that discharge storm water. Material or handling areas shall be inspected and cleaned to reduce the potential for pollutants to enter the storm water conveyance system.
 - iv. Spill Prevention and Response - Identification of areas where significant materials can spill into or otherwise enter the storm water conveyance systems and their accompanying drainage points. Specific material handling procedures, storage requirements, spill clean up equipment and procedures should be identified, as appropriate. Internal notification procedures for spills of significant materials should be established.
 - v. Storm Water Management Practices - Storm water management practices are practices other than those which control the source of pollutants. They include measures such as installing oil and grit separators, diverting storm water into retention basins, etc. Based on assessment of the potential of various sources to contribute pollutants, measures to remove pollutants from storm water discharge shall be implemented. In developing the plan, the following management practices shall be considered:
 - (A). Containment - Storage within berms or other secondary containment devices to prevent leaks and spills from entering storm water runoff;
 - (B). Oil & Grease Separation - Oil/water separators, booms, skimmers or other methods to minimize oil contaminated

NPDES Permit No. IL0077259

Special Conditions

storm water discharges;

- (C). Debris & Sediment Control - Screens, booms, sediment ponds or other methods to reduce debris and sediment in storm water discharges;
 - (D). Waste Chemical Disposal - Waste chemicals such as antifreeze, degreasers and used oils shall be recycled or disposed of in an approved manner and in a way which prevents them from entering storm water discharges;
 - (E). Storm Water Diversion - Storm water diversion away from storage and other areas of potential storm water contamination;
 - (F). Covered Storage - Covered fueling operations and storage areas to prevent contact with storm water.
- vi. Sediment and Erosion Prevention - The plan shall identify areas which due to topography, activities, or other factors, have a high potential for significant soil erosion and describe measures to limit erosion.
 - vii. Employee Training - Employee training programs shall inform personnel at all levels of responsibility of the components and goals of the storm water pollution control plan. Training should address topics such as spill response, good housekeeping and material management practices. The plan shall identify periodic dates for such training.
 - viii. Inspection Procedures - Qualified plant personnel shall be identified and inspect designated equipment and landfill areas. A tracking or follow-up procedure shall be used to ensure appropriate response has been taken in response to an inspection. Inspections and maintenance activities shall be documented and recorded with copies of the records maintained at the site of the permitted landfill.

B. CONSTRUCTION AUTHORIZATION

Authorization is hereby granted to construct treatment works and related equipment that may be required by the Storm Water Pollution Prevention Plan developed pursuant to this permit.

This Authorization is issued subject to the following condition(s).

1. If any statement or representation is found to be incorrect, this authorization may be revoked and the permittee thereupon waives all rights thereunder.
2. The issuance of this authorization (a) does not release the permittee from any liability for damage to persons or property caused by or resulting from the installation, maintenance or operation of the proposed facilities; (b) does not take into consideration the structural stability of any units or part of this project; and (c) does not release the permittee from compliance with other applicable statutes of the State of Illinois, or other applicable local law, regulations or ordinances.
3. Plans and specifications of all treatment equipment being included as a part of the storm water management practice shall be included in the SWPPP.
4. Any modification of or deviation from the plans and specifications included in the site's current SWPPP requires amendment of the SWPPP.

C. REPORTING

1. The facility shall submit a quarterly inspection report to the Illinois Environmental Protection Agency. The report shall include results of the facility inspections which are required by A.1.f. of this permit. The reports shall also include documentation of any event (spill, treatment unit malfunction, etc.) which would require an inspection, results of the inspection, and any subsequent corrective maintenance activity. The report shall be completed and signed by the authorized facility employee(s) who conducted the inspection(s).
2. All reports shall contain information gathered during the previous quarter beginning with the effective date of this permit and shall be submitted no later than 30 days after each quarter with each subsequent report containing the previous quarter's information.

Special Conditions

3. Quarterly inspection reports shall be mailed to the following address:

Illinois Environmental Protection Agency
Bureau of Water
Compliance Assurance Section, Mail Code #19
Quarterly Report
1021 North Grand Avenue East
P.O. Box 19276
Springfield, Illinois 62794-9276

4. If the facility performs inspections more frequently than required by this permit, the results shall be included as additional information in the quarterly report.

D. DEFINITIONS

1. Non-contaminated stormwater means stormwater which does not come in direct contact with landfill wastes, the waste handling and treatment areas, or landfill wastewater. Non-contaminated stormwater includes stormwater which flows off the cap, cover, intermediate cover, daily cover, and/or final cover of the landfill.
2. Landfill wastewater means all wastewater associated with, or produced by, landfilling activities except for sanitary wastewater, non-contaminated storm water, contaminated ground water, and wastewater from recovery pumping wells. Landfill wastewater includes, but is not limited to, leachate, gas collection condensate, drained free liquids, laboratory derived wastewater, contaminated storm water and contact washwater from washing truck, equipment, and railcar exteriors and surface areas which have come in direct contact with solid waste at the landfill facility.
3. Land application unit means an area where wastes are applied onto or incorporated into the soil surface (excluding manure spreading operations) for treatment or disposal.
4. Landfill means an area of land or an excavation in which wastes are placed for permanent disposal, and which is not a land application unit, surface impoundment, injection well or waste pile.
5. Section 313 water priority chemical means a chemical or chemical categories which: 1) Are listed at 40 CFR 372.65 pursuant to Section 313 of the Emergency Planning and Community Right-to-Know Act (EPCRA) (also known as Title III of the Superfund Amendments and Reauthorization Act (SARA) of 1987); 2) are present at or above threshold levels at a facility subject to EPCRA Section 313 reporting requirements; and 3) that meet at least one of the following criteria: (i) Are listed in Appendix D of 40 CFR 122 on either Table II (organic priority pollutants), Table III (certain metals, cyanides, and phenols) or Table V (certain toxic pollutants and hazardous substances); (ii) are listed as a hazardous substance pursuant to Section 311(b)(2)(A) of the CWA at 40 CFR 116.4; or (iii) are pollutants for which EPA has published acute or chronic water quality criteria.
6. Significant materials includes, but is not limited to: raw materials; fuels; materials such as solvents, detergents, and plastic pellets; finished materials such as metallic products; raw materials used in food processing or production; hazardous substances designated under Section 101(14) of CERCLA; any chemical the facility is required to report pursuant to EPCRA Section 313; fertilizers; pesticides; and waste products such as ashes, slag and sludge that have the potential to be released with storm water discharges.
7. Significant spills includes, but is not limited to: releases of oil or hazardous substances in excess of reportable quantities under Section 311 of the Clean Water Act (see 40 CFR 110.10 and CFR 117.21) or Section 102 of CERCLA (see 40 CFR 302.4).
8. Leachate means liquid containing materials removed from solid waste. For the purpose of this permit, storm water which falls onto areas of the landfill which have exposed waste or seeps shall be considered leachate.
9. Solid waste means a waste that is defined in this Section as an inert waste, as a putrescible waste, as a chemical waste or as a special waste, and which is not also defined as a hazardous waste pursuant to 35 Ill. Adm. Code 721.
10. Chemical waste means a non-putrescible solid whose characteristics are such that any contaminated leachate is expected to be formed through chemical or physical processes, rather than biological processes, and no gas is expected to be formed as a result.
11. Inert waste means any solid waste that will not decompose biologically, burn, serve as food for vectors, form a gas, cause an odor, or form a contaminated leachate, as determined in accordance with Section 811.202(b). Such inert wastes shall include only non-biodegradable and non-putrescible solid wastes. Inert wastes may include, but are not limited to, bricks, masonry and concrete (cured for 60 days or more).
12. Putrescible waste means a solid waste that contains organic matter capable of being decomposed by microorganisms so as to cause a malodor, gases, or other offensive conditions, or which is capable of providing food for birds and other vectors.

NPDES Permit No. IL0077259

Special Conditions

Putrescible wastes may form a contaminated leachate from microbiological degradation, chemical processes, and physical processes. Putrescible waste includes, but is not limited to, garbage, offal, dead animals, general household waste, and commercial waste. All solid wastes which do not meet the definitions of inert or chemical wastes shall be considered putrescible wastes.

13. Special waste means any industrial process waste, pollution control waste or hazardous waste, except as determined pursuant to Section 22.9 of the Act and 35 Ill. Adm. Code 808.
14. Daily cover described in 35 Ill. Adm. Code 811.106.
15. Intermediate cover described in 35 Ill. Adm. Code 811.313.
16. Final cover described in 35 Ill. Adm. Code 811.314 or other approved cover systems.
17. Ancillary activities means any equipment, structures and other devices that are necessary for proper operation of the landfill in accordance with the requirements of the Environmental Protection Act (current edition).
18. Industrial wastes means waste that is received from any of the facilities described in 40 CFR 122.26(b)(14).
19. Significant rain event means any rainfall event or equivalent snowfall which is 0.1 inches or greater and occurs, at a minimum, 72 hours from the previously measurable (greater than 0.1 inch rainfall or equivalent snow melt) storm event.

Note that additional definitions are included in the permit Standard Conditions, Attachment H.

E. SAMPLE REQUIREMENTS

The permittee shall initiate a quarterly monitoring program of stormwater or snowmelt discharges associated with active or inactive landfills and any on-site ancillary activities. Samples shall be collected from the discharge resulting from a rainfall event that is greater than 0.1 inches in magnitude or equivalent snow melt and occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall or equivalent snow melt) storm event. Storm water discharges resulting from strictly landfill construction activities, areas of the landfill under construction that have not received waste, shall not be required to perform monitoring.

For discharges from holding ponds or other impoundments with a retention period greater than 24 hours, a minimum of one grab sample may be taken and analyzed. For all other discharges, a grab sample shall be taken during the first thirty minutes of the discharge and a minimum of three sample aliquots taken in each hour of the discharge for the entire discharge or the first three hours of the discharge, with each aliquot being separated by a minimum period of fifteen minutes. The grab sample taken during the initial thirty minutes of discharge shall be analyzed separately and the remaining sample aliquots may be combined to form a single sample for analysis.

The Permittee shall record monitoring results on Discharge Monitoring Report (DMR) Forms using one such form for each outfall each month.

In the event that an outfall does not discharge during a monthly reporting period, the DMR Form shall be submitted with no discharge indicated.

The Permittee may choose to submit electronic DMRs (NetDMRs) instead of mailing paper DMRs to the IEPA. More information, including registration information for the NetDMR program, can be obtained on the IEPA website, <http://www.epa.state.il.us/water/net-dmr/index.html>.

The completed Discharge Monitoring Report forms shall be submitted to IEPA no later than the 28th day of the following month, unless otherwise specified by the permitting authority.

Permittees not using NetDMRs shall mail Discharge Monitoring Reports with an original signature to the IEPA at the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276

Attention: Compliance Assurance Section, Mail Code # 19

The permittee shall sample stormwater discharges for the following:

Special Conditions

Ammonia (as N)	Lead
Arsenic	Manganese
Barium	Mercury
BOD ₅	Nickel
Boron	pH
Cadmium	Phenols
Chloride	Sulfate
Chromium (Hexavalent)	Iron (Total)
Chromium (Trivalent)	Total Dissolved Solids
Copper	Temperature
Fluoride	TOC
Oil & Grease	TSS
Hardness	Zinc
Iron (dissolved)	

Monitoring requirements for oil and grease, pH and temperature shall only be performed on the initial grab sample.

In addition to the sample requirements, the permittee shall make a reasonable attempt to measure the flow of the stormwater discharge from each outfall and the storm duration and total precipitation quantity causing the stormwater discharge on a daily basis and report results as a monthly average and daily maximum value in units of Million Gallons per Day (MGD) on the monthly DMR forms.

Unless otherwise indicated, concentrations refer to the total amount of the constituent present in all phases, whether solid, suspended or dissolved, elemental or combined, including all oxidation states. Where constituents are commonly measured as other than total, the word "total" is inserted for clarity.

The analyses for the above parameters shall meet the detection limits as established for accepted test procedures listed in 40 CFR 136. Mercury shall be monitored using USEPA Method 1631.

Quarterly sample results shall be submitted with the January, April, July and October DMR's.

SPECIAL CONDITION 2. For the purpose of this permit, outfalls 001, 002, 003, and 004 are limited to stormwater, free from leachate and other wastewater discharges.

SPECIAL CONDITION 3. Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

SPECIAL CONDITION 4. If an applicable effluent standard or limitation is promulgated under Sections 301(b)(2)(C) and (D), 304(b)(2), and 307(a)(2) of the Clean Water Act and that effluent standard or limitation is more stringent than any effluent limitation in the permit or controls a pollutant not limited in the NPDES Permit, the Agency shall revise or modify the permit in accordance with the more stringent standard or prohibition and shall so notify the permittee.

SPECIAL CONDITION 5. The issuance of this permit, construction authorizations or other approvals, does not relieve the permittee of the responsibilities of complying with the provisions required by the Bureau of Land.

SPECIAL CONDITION 6. The use of copper sulfate as an algicide is approved provided its use is in accordance with label requirements and it is applied by a licensed applicator.

SPECIAL CONDITION 7. The permittee shall request modification of this permit in accordance with attachment H prior to utilizing biosolids or bioremediated soils as final protective cover, final cover, intermediate cover or daily cover.

SPECIAL CONDITION 8. Flow shall be measured in units of Million Gallons per Day (MGD) and reported as a monthly average and a daily maximum on the Discharge Monitoring Report.

SPECIAL CONDITION 9. The effluent, alone or in combination with other sources, shall not cause a violation of any applicable water quality standard outlined in 35 Ill. Adm. Code 302.

SPECIAL CONDITION 10.

STORMWATER POLLUTION PREVENTION PLAN (SWPPP) FOR OUTFALLS 003 and 004

Special Conditions

- A. A storm water pollution prevention plan shall be maintained by the permittee for the storm water associated with industrial activity at this facility. The plan shall identify potential sources of pollution which may be expected to affect the quality of storm water discharges associated with the industrial activity at the facility. In addition, the plan shall describe and ensure the implementation of practices which are to be used to reduce the pollutants in storm water discharges associated with industrial activity at the facility and to assure compliance with the terms and conditions of this permit. The permittee shall modify the plan if substantive changes are made or occur affecting compliance with this condition.
1. Waters not classified as impaired pursuant to Section 303(d) of the Clean Water Act.

Unless otherwise specified by federal regulation, the storm water pollution prevention plan shall be designed for a storm event equal to or greater than a 25-year 24-hour rainfall event.
 2. Waters classified as impaired pursuant to Section 303(d) of the Clean Water Act

For any site which discharges directly to an impaired water identified in the Agency's 303(d) listing, and if any parameter in the subject discharge has been identified as the cause of impairment, the storm water pollution prevention plan shall be designed for a storm event equal to or greater than a 25-year 24-hour rainfall event. If required by federal regulations, the storm water pollution prevention plan shall adhere to a more restrictive design criteria.
- B. The operator or owner of the facility shall make a copy of the plan available to the Agency at any reasonable time upon request.

Facilities which discharge to a municipal separate storm sewer system shall also make a copy available to the operator of the municipal system at any reasonable time upon request.
- C. The permittee may be notified by the Agency at any time that the plan does not meet the requirements of this condition. After such notification, the permittee shall make changes to the plan and shall submit a written certification that the requested changes have been made. Unless otherwise provided, the permittee shall have 30 days after such notification to make the changes.
- D. The discharger shall amend the plan whenever there is a change in construction, operation, or maintenance which may affect the discharge of significant quantities of pollutants to the waters of the State or if a facility inspection required by paragraph H of this condition indicates that an amendment is needed. The plan should also be amended if the discharger is in violation of any conditions of this permit, or has not achieved the general objective of controlling pollutants in storm water discharges. Amendments to the plan shall be made within 30 days of any proposed construction or operational changes at the facility, and shall be provided to the Agency for review upon request.
- E. The plan shall provide a description of potential sources which may be expected to add significant quantities of pollutants to storm water discharges, or which may result in non-storm water discharges from storm water outfalls at the facility. The plan shall include, at a minimum, the following items:
1. A topographic map extending one-quarter mile beyond the property boundaries of the facility, showing: the facility, surface water bodies, wells (including injection wells), seepage pits, infiltration ponds, and the discharge points where the facility's storm water discharges to a municipal storm drain system or other water body. The requirements of this paragraph may be included on the site map if appropriate. Any map or portion of map may be withheld for security reasons.
 2. A site map showing:
 - i. The storm water conveyance and discharge structures;
 - ii. An outline of the storm water drainage areas for each storm water discharge point;
 - iii. Paved areas and buildings;
 - iv. Areas used for outdoor manufacturing, storage, or disposal of significant materials, including activities that generate significant quantities of dust or particulates.
 - v. Location of existing storm water structural control measures (dikes, coverings, detention facilities, etc.);
 - vi. Surface water locations and/or municipal storm drain locations
 - vii. Areas of existing and potential soil erosion;
 - viii. Vehicle service areas;

Special Conditions

- ix. Material loading, unloading, and access areas.
 - x. Areas under items iv and ix above may be withheld from the site for security reasons.
3. A narrative description of the following:
 - i. The nature of the industrial activities conducted at the site, including a description of significant materials that are treated, stored or disposed of in a manner to allow exposure to storm water;
 - ii. Materials, equipment, and vehicle management practices employed to minimize contact of significant materials with storm water discharges;
 - iii. Existing structural and non-structural control measures to reduce pollutants in storm water discharges;
 - iv. Industrial storm water discharge treatment facilities;
 - v. Methods of onsite storage and disposal of significant materials.
 4. A list of the types of pollutants that have a reasonable potential to be present in storm water discharges in significant quantities. Also provide a list of any pollutant that is listed as impaired in the most recent 303(d) report.
 5. An estimate of the size of the facility in acres or square feet, and the percent of the facility that has impervious areas such as pavement or buildings.
 6. A summary of existing sampling data describing pollutants in storm water discharges.
- F. The plan shall describe the storm water management controls which will be implemented by the facility. The appropriate controls shall reflect identified existing and potential sources of pollutants at the facility. The description of the storm water management controls shall include:
1. Storm Water Pollution Prevention Personnel - Identification by job titles of the individuals who are responsible for developing, implementing, and revising the plan.
 2. Preventive Maintenance - Procedures for inspection and maintenance of storm water conveyance system devices such as oil/water separators, catch basins, etc., and inspection and testing of plant equipment and systems that could fail and result in discharges of pollutants to storm water.
 3. Good Housekeeping - Good housekeeping requires the maintenance of clean, orderly facility areas that discharge storm water. Material handling areas shall be inspected and cleaned to reduce the potential for pollutants to enter the storm water conveyance system.
 4. Spill Prevention and Response - Identification of areas where significant materials can spill into or otherwise enter the storm water conveyance systems and their accompanying drainage points. Specific material handling procedures, storage requirements, spill cleanup equipment and procedures should be identified, as appropriate. Internal notification procedures for spills of significant materials should be established.
 5. Storm Water Management Practices - Storm water management practices are practices other than those which control the source of pollutants. They include measures such as installing oil and grit separators, diverting storm water into retention basins, etc. Based on assessment of the potential of various sources to contribute pollutants, measures to remove pollutants from storm water discharge shall be implemented. In developing the plan, the following management practices shall be considered:
 - i. Containment - Storage within berms or other secondary containment devices to prevent leaks and spills from entering storm water runoff. To the maximum extent practicable storm water discharged from any area where material handling equipment or activities, raw material, intermediate products, final products, waste materials, by-products, or industrial machinery are exposed to storm water should not enter vegetated areas or surface waters or infiltrate into the soil unless adequate treatment is provided.
 - ii. Oil & Grease Separation - Oil/water separators, booms, skimmers or other methods to minimize oil contaminated storm water discharges.
 - iii. Debris & Sediment Control - Screens, booms, sediment ponds or other methods to reduce debris and sediment in storm water discharges.

Special Conditions

- iv. Waste Chemical Disposal - Waste chemicals such as antifreeze, degreasers and used oils shall be recycled or disposed of in an approved manner and in a way which prevents them from entering storm water discharges.
 - v. Storm Water Diversion - Storm water diversion away from materials manufacturing, storage and other areas of potential storm water contamination. Minimize the quantity of storm water entering areas where material handling equipment of activities, raw material, intermediate products, final products, waste materials, by-products, or industrial machinery are exposed to storm water using green infrastructure techniques where practicable in the areas outside the exposure area, and otherwise divert storm water away from exposure area.
 - vi. Covered Storage or Manufacturing Areas - Covered fueling operations, materials manufacturing and storage areas to prevent contact with storm water.
 - vii. Storm Water Reduction - Install vegetation on roofs of buildings within adjacent to the exposure area to detain and evapotranspire runoff where precipitation falling on the roof is not exposed to contaminants, to minimize storm water runoff; capture storm water in devices that minimize the amount of storm water runoff and use this water as appropriate based on quality.
6. Sediment and Erosion Prevention - The plan shall identify areas which due to topography, activities, or other factors, have a high potential for significant soil erosion. The plan shall describe measures to limit erosion.
 7. Employee Training - Employee training programs shall inform personnel at all levels of responsibility of the components and goals of the storm water pollution control plan. Training should address topics such as spill response, good housekeeping and material management practices. The plan shall identify periodic dates for such training.
 8. Inspection Procedures - Qualified plant personnel shall be identified to inspect designated equipment and plant areas. A tracking or follow-up procedure shall be used to ensure appropriate response has been taken in response to an inspection. Inspections and maintenance activities shall be documented and recorded.
- G. Non-Storm Water Discharge - The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-storm water discharge. The certification shall include a description of any test for the presence of non-storm water discharges, the methods used, the dates of the testing, and any onsite drainage points that were observed during the testing. Any facility that is unable to provide this certification must describe the procedure of any test conducted for the presence of non-storm water discharges, the test results, potential sources of non-storm water discharges to the storm sewer, and why adequate tests for such storm sewers were not feasible.
- H. Quarterly Visual Observation of Discharges - The requirements and procedures for quarterly visual observations are applicable to all outfalls covered by this condition.
1. You must perform and document a quarterly visual observation of a storm water discharge associated with industrial activity from each outfall. The visual observation must be made during daylight hours. If no storm event resulted in runoff during daylight hours from the facility during a monitoring quarter, you are excused from the visual observations requirement for that quarter, provided you document in your records that no runoff occurred. You must sign and certify the document.
 2. Your visual observation must be made on samples collected as soon as practical, but not to exceed 1 hour or when the runoff or snow melt begins discharging from your facility. All samples must be collected from a storm event discharge that is greater than 0.1 inch in magnitude and that occurs at least 72 hours from the previously measureable (greater than 0.1 inch rainfall) storm event. The observation must document: color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of storm water pollution. If visual observations indicate any unnatural color, odor, turbidity, floatable material, oil sheen or other indicators of storm water pollution, the permittee shall obtain a sample and monitor for the parameter or the list of pollutants in Part E.4.
 3. You must maintain your visual observation reports onsite with the SWPPP. The report must include the observation date and time, inspection personnel, nature of the discharge (i.e., runoff or snow melt), visual quality of the storm water discharge (including observations of color, odor, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of storm water pollution), and probable sources of any observed storm water contamination.
 4. You may exercise a waiver of the visual observation requirement at a facility that is inactive or unstaffed, as long as there are no industrial materials or activities exposed to storm water. If you exercise this waiver, you must maintain a certification with your SWPPP stating that the site is inactive and unstaffed, and that there are no industrial materials or activities exposed to storm water.
 5. Representative Outfalls - If your facility has two or more outfalls that you believe discharge substantially identical effluents, based on similarities of the industrial activities, significant materials, size of drainage areas, and storm water management

NPDES Permit No. IL0077259

Special Conditions

practices occurring within the drainage areas of the outfalls, you may conduct visual observations of the discharge at just one of the outfalls and report that the results also apply to the substantially identical outfall(s).

6. The visual observation documentation shall be made available to the Agency and general public upon written request.
- I. The permittee shall conduct an annual facility inspection to verify that all elements of the plan, including the site map, potential pollutant sources, and structural and non-structural controls to reduce pollutants in industrial storm water discharges are accurate. Observations that require a response and the appropriate response to the observation shall be retained as part of the plan. Records documenting significant observations made during the site inspection shall be submitted to the Agency in accordance with the reporting requirements of this permit.
- J. This plan should briefly describe the appropriate elements of other program requirements, including Spill Prevention Control and Countermeasures (SPCC) plans required under Section 311 of the CWA and the regulations promulgated there under, and Best Management Programs under 40 CFR 125.100.
- K. The plan is considered a report that shall be available to the public at any reasonable time upon request.
- L. The plan shall include the signature and title of the person responsible for preparation of the plan and include the date of initial preparation and each amendment thereto.
- M. Facilities which discharge storm water associated with industrial activity to municipal separate storm sewers may also be subject to additional requirement imposed by the operator of the municipal system

Construction Authorization

Authorization is hereby granted to construct treatment works and related equipment that may be required by the Storm Water Pollution Prevention Plan developed pursuant to this permit.

This Authorization is issued subject to the following condition(s).

- N. If any statement or representation is found to be incorrect, this authorization may be revoked and the permittee there upon waives all rights there under.
- O. The issuance of this authorization (a) does not release the permittee from any liability for damage to persons or property caused by or resulting from the installation, maintenance or operation of the proposed facilities; (b) does not take into consideration the structural stability of any units or part of this project; and (c) does not release the permittee from compliance with other applicable statutes of the State of Illinois, or other applicable local law, regulations or ordinances.
- P. Plans and specifications of all treatment equipment being included as part of the stormwater management practice shall be included in the SWPPP.
- Q. Construction activities which result from treatment equipment installation, including clearing, grading and excavation activities which result in the disturbance of one acre or more of land area, are not covered by this authorization. The permittee shall contact the IEPA regarding the required permit(s).

REPORTING

- R. The facility shall submit an electronic copy of the annual inspection report to the Illinois Environmental Protection Agency at epa.npdes.inspection@illinois.gov. The report shall include results of the annual facility inspection which is required by Part I of this condition. The report shall also include documentation of any event (spill, treatment unit malfunction, etc.) which would require an inspection, results of the inspection, and any subsequent corrective maintenance activity. The report shall be completed and signed by the authorized facility employee(s) who conducted the inspection(s). The annual inspection report is considered a public document that shall be available at any reasonable time upon request.
- S. The first report shall contain information gathered during the one year time period beginning with the effective date of coverage under this permit and shall be submitted no later than 60 days after this one year period has expired. Each subsequent report shall contain the previous year's information and shall be submitted no later than one year after the previous year's report was due.
- T. If the facility performs inspections more frequently than required by this permit, the results shall be included as additional information in the annual report.
- U. The permittee shall retain the annual inspection report on file at least 3 years. This period may be extended by request of the Illinois Environmental Protection Agency at any time.
Annual inspection reports shall be mailed to the following address:

Special Conditions

Illinois Environmental Protection Agency
Bureau of Water
Compliance Assurance Section
Annual Inspection Report
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276

- V. The permittee shall notify any regulated small municipal separate storm sewer owner (MS4 Community) that they maintain coverage under an individual NPDES permit. The permittee shall submit any SWPPP or any annual inspection to the MS4 community upon request by the MS4 community.