Notice No. SKT:15110401.bah

Public Notice Beginning Date: January 12, 2016

Public Notice Ending Date: February 11, 2016

National Pollutant Discharge Elimination System (NPDES) Permit Program

PUBLIC NOTICE/FACT SHEET

of

Draft Reissued NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By:

Illinois EPA Division of Water Pollution Control Permit Section 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276 217/782-0610

Name and Address of Discharger:

Village of Manito 109 North Broadway P.O. Box 618 Manito, Illinois 61546 Name and Address of Facility: Village of Manito STP North Street Manito, Illinois (Mason County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue a NPDES Permit to discharge into the waters of the state and has prepared a draft Permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. All comments on the draft Permit and requests for hearing must be received by the IEPA by U.S. Mail, carrier mail or hand delivered by the Public Notice Ending Date. Interested persons are invited to submit written comments on the draft Permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. Persons submitting comments and/or requests for public hearing shall also send a copy of such comments or requests to the Permit applicant. The NPDES Permit and notice numbers must appear on each comment page.

The application, engineer's review notes including load limit calculations, Public Notice/Fact Sheet, draft Permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

If written comments or requests indicate a significant degree of public interest in the draft Permit, the permitting authority may, at its discretion, hold a public hearing. Public notice will be given 45 days before any public hearing. Response to comments will be provided when the final Permit is issued. For further information, please call Surinder Tandon at 217/782-0610.

The following water quality and effluent standards and limitations were applied to the discharge:

Title 35: Environmental Protection, Subtitle C: Water Pollution, Chapter I: Pollution Control Board and the Clean Water Act were applied in determining the applicable standards, limitations and conditions contained in the draft Permit.

The applicant is engaged in treating domestic wastewater for the Village of Manito.

The length of the Permit is approximately 5 years.

The main discharge number is 001. The seven day once in ten year low flow (7Q10) of the receiving stream, Manito Ditch tributary to Hickory Grove Ditch is 0 cfs.

The design average flow (DAF) for the facility is 0.2 million gallons per day (MGD) and the design maximum flow (DMF) for the facility is 0.5 MGD. Treatment consists of comminutors, activated sludge, aerated lagoon, rock filter. Sludge is treated by aerobic digestion, drying beds and landfill.

Public Notice/Fact Sheet -- Page 2 -- NPDES Permit No. IL0035904

This Reissued Permit does not increase the facility's DAF, DMF, concentration limits, and/or load limits.

Pursuant to the waiver provisions authorized by 40 CFR § 123.24, this draft permit is within the class, type, and size for which the Regional Administrator, Region V, has waived his right to review, object, or comment on this draft permit action.


This Permit recognizes and continues the year-round disinfection exemption approved by the IEPA on June 19, 1996 and revalidated on November 9, 2015 and included in past NPDES permit actions since the original date of approval. It is the IEPA's tentative decision that under Illinois Pollution Control Board regulations, the following reach of waterbody is not classified for primary contact use activities and is not subject to the fecal coliform water quality standard of 35 III. Adm. Code 302.209.

This draft permit does not contain requirements for disinfection of the discharge from discharge numbers(s) 001. Hickory Ditch, from the discharge to its confluence with the Mackinaw River has been determined to be unsuited to support primary contact activities (swimming) due to physical, hydrologic or geographic configuration. Anyone knowing of primary contact activities occurring within this water segment is invited to submit comments to the IEPA. Comments should give the nature of the activities (i.e. swimming, fishing, canoeing, etc.), the location and months of the year when these activities have been observed. The IEPA is also interested in obtaining information on the proximity of residential dwellings and the accessibility of the public to this water segment. Anyone with such information is asked to submit comments to the IEPA on this draft permit action. Instructions for submitting comments are contained earlier in this document.

Application is made for the existing discharge(s) which is located in Mason County, Illinois. The following information identifies the discharge point, receiving stream and stream classifications:

Discharge				Stream	Integrity
Number	Receiving Stream	Latitude	Longitude	Classification	Rating
001	Manito Ditch tributary to Hickory Grove Ditch	40° 25' 45" North	89° 46' 38" West	General Use	Not Rated

To assist you further in identifying the location of the discharge(s) please see the attached map.

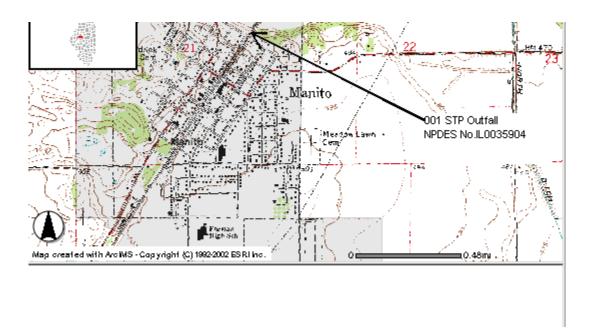

Manito Ditch (no segment code) tributary to Hickory Grove Ditch, Waterbody Segment DKB-01, is not listed as impaired on the draft 2014 Illinois Integrated Water Quality Report and Section 303(d) List.

Public Notice/Fact Sheet -- Page 3 -- NPDES Permit No. IL0035904

The discharge(s) from the facility is (are) proposed to be monitored and limited at all times as follows:

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 0.2 MGD (design maximum flow (DMF) of 0.5 MGD).

The effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		C	ONCENTRATI			
Parameter	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	Regulation
CBOD ₅ **	42 (104)	67 (167)		25	40		35 IAC 304.120 40 CFR 133.102
Suspended Solids**	62 (154)	75 (188)		37	45		35 IAC 304.120 40 CFR 133.102
рН	Shall be in th	Shall be in the range of 6 to 9 Standard Units					
Fecal Coliform	Monitor Only (May through October)						35 IAC 309.146
Chlorine Residual						0.05	35 IAC 302.208
Ammonia Nitrogen (as N)	Monitor Only						35 IAC 309.146
				Monthly Avg. not less than	Weekly Avg. not less than	Daily Minimum	
Dissolved Oxygen March-July				N/A	6.0	5.0	35 IAC 302.206
August-February				5.5	4.0	3.5	

*Load Limits are calculated by using the formula: 8.34 x (Design Average and/or Maximum Flow in MGD) x (Applicable Concentration in mg/L)

** BOD_5 and Suspended Solids (85% removal required): In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent except as provided in Sections 133.103 and 133.105.

Public Notice/Fact Sheet -- Page 4 -- NPDES Permit No. IL0035904

This draft Permit also contains the following requirements as special conditions:

- 1. Reopening of this Permit to include different final effluent limitations.
- 2. Operation of the facility by or under the supervision of a certified operator.
- 3. Submission of the operational data in a specified form and at a required frequency at any time during the effective term of this Permit.
- 4. More frequent monitoring requirement without Public Notice in the event of operational, maintenance or other problems resulting in possible effluent deterioration.
- 5. Prohibition against causing or contributing to violations of water quality standards.
- 6. Recording the monitoring results on Discharge Monitoring Report Forms using one such form for each outfall each month and submitting the forms to IEPA each month.
- 7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.
- 8. Effluent sampling point location.
- 9. At minimum of 85% removal of CBOD₅ and suspended solids.
- 10. Controlling the sources of infiltration and inflow into the sewer system.
- 11. A requirement to monitor and a limit of 0.05 mg/L for residual chlorine when it is used.
- 12. Submission of annual fiscal data.
- 13. Submission of semi annual reports indicating the quantities of sludge generated and disposed.
- 14. Reopening of this Permit to include revised effluent limitations based on a Total Maximum Daily Load (TMDL) or other water quality study.

Illinois Environmental Protection Agency

Division of Water Pollution Control

1021 North Grand Avenue East

Post Office Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Reissued (NPDES) Permit

Expiration Date:

Name and Address of Permittee: Village of Manito 109 North Broadway P.O. Box 618 Manito, Illinois 61546 Issue Date: Effective Date:

Facility Name and Address: Village of Manito STP North Street Manito, Illinois (Mason County)

Receiving Waters: Manito Ditch tributary to Hickory Grove Ditch

In compliance with the provisions of the Illinois Environmental Protection Act, Title 35 of the Ill. Adm. Code, Subtitle C, Chapter I, and the Clean Water Act (CWA), the above-named Permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the Effluent Limitations, Monitoring, and Reporting requirements; Special Conditions and Attachment H Standard Conditions attached herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the Permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Alan Keller, P.E. Manager, Permit Section Division of Water Pollution Control

SAK:SKT:15110401.bah

Page 2

NPDES Permit No. IL0035904

Effluent Limitations, Monitoring, and Reporting

FINAL

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 0.2 MGD (design maximum flow (DMF) of 0.5 MGD).

From the effective date of this Permit until the expiration date, the effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		CONCENTRATION LIMITS mg/L					
Parameter	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly Average	Weekly <u>Average</u>	<u>Daily</u> <u>Maximum</u>	Sample <u>Frequency</u>	Sample <u>Type</u>
Flow (MGD)							Continuous	
CBOD ₅ **' ****	42 (104)	67 (167)		25	40		1 Day/Month	Grab
Suspended Solids***	62 (154)	75 (188)		37	45		1 Day/Month	Grab
рН	Shall be in t	Shall be in the range of 6 to 9 Standard Units					1 Day/Month	Grab
Fecal Coliform		Monitor Only (May through October)					1 Day/Month	Grab
Chlorine Residual						0.05	****	Grab
Ammonia Nitrogen (as N)	Monitor Only						1 Day/Month	Grab
				Monthly Average not less than	Weekly Average not less than	Daily Minimum		
Dissolved Oxygen March-July				N/A	6.0	5.0	1 Day/Month	Grab
August-February				5.5	4.0	3.5	1 Day/Month	Grab

*Load limits based on design maximum flow shall apply only when flow exceeds design average flow.

**Carbonaceous BOD₅ (CBOD₅) testing shall be in accordance with 40 CFR 136.

***The 30 day average removal shall not be less than 85%. See Special Condition 9.

****See Special Condition 11.

Flow shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

Fecal Coliform shall be monitored May through October with sample results reported as a daily maximum value on the DMR as a daily maximum value.

pH shall be reported on the DMR as minimum and maximum value.

Dissolved oxygen shall be reported on the DMR as a minimum value.

Influent Monitoring, and Reporting

The influent to the plant shall be monitored as follows:

Parameter	Sample Frequency	Sample Type		
Flow (MGD)	Continuous			
BOD ₅	1 Day/Month	Composite		
Suspended Solids	1 Day/Month	Composite		

Influent samples shall be taken at a point representative of the influent.

Flow (MGD) shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

 BOD_5 and Suspended Solids shall be reported on the DMR as a monthly average concentration.

Special Conditions

<u>SPECIAL CONDITION 1</u>. This Permit may be modified to include different final effluent limitations or requirements which are consistent with applicable laws and regulations. The IEPA will public notice the permit modification.

SPECIAL CONDITION 2. The use or operation of this facility shall be by or under the supervision of a Certified Class 2 operator.

<u>SPECIAL CONDITION 3</u>. The IEPA may request in writing submittal of operational information in a specified form and at a required frequency at any time during the effective period of this Permit.

<u>SPECIAL CONDITION 4</u>. The IEPA may request more frequent monitoring by permit modification pursuant to 40 CFR § 122.63 and <u>Without Public Notice</u>.

<u>SPECIAL CONDITION 5</u>. The effluent, alone or in combination with other sources, shall not cause a violation of any applicable water quality standard outlined in 35 III. Adm. Code 302.

<u>SPECIAL CONDITION 6.</u> The Permittee shall record monitoring results on Discharge Monitoring Report (DMR) Forms using one such form for each outfall each month.

In the event that an outfall does not discharge during a monthly reporting period, the DMR Form shall be submitted with no discharge indicated.

The Permittee may choose to submit electronic DMRs (NetDMRs) instead of mailing paper DMRs to the IEPA. More information, including registration information for the NetDMR program, can be obtained on the IEPA website, http://www.epa.state.il.us/water/net-dmr/index.html.

The completed Discharge Monitoring Report forms shall be submitted to IEPA no later than the 25th day of the following month, unless otherwise specified by the permitting authority.

Permittees not using NetDMRs shall mail Discharge Monitoring Reports with an original signature to the IEPA at the following address:

Illinois Environmental Protection Agency Division of Water Pollution Control Attention: Compliance Assurance Section, Mail Code # 19 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

SPECIAL CONDITION 7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.

<u>SPECIAL CONDITION 8.</u> Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

<u>SPECIAL CONDITION 9</u>. BOD₅ and Suspended Solids (85% removal required) For Discharge No. 001: In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent except as provided in Sections 133.103 and 133.105. The percent removal need not be reported to the IEPA on DMRs but influent and effluent data must be available, as required elsewhere in this Permit, for IEPA inspection and review. For measuring compliance with this requirement, 5 mg/L shall be added to the effluent CBOD₅ concentration.

Percent removal is a percentage expression of the removal efficiency across a treatment plant for a given pollutant parameter, as determined from the 30-day average values of the raw wastewater influent concentrations to the facility and the 30-day average values of the effluent pollutant concentrations for a given time period.

<u>SPECIAL CONDITION 10</u>. Consistent with permit modification procedures in 40 CFR 122.62 and 63, this Permit may be modified to include requirements for the Permittee on a continuing basis to evaluate and detail its efforts to effectively control sources of infiltration and inflow into the sewer system and to submit reports to the IEPA if necessary.

<u>SPECIAL CONDITION 11</u>. For Discharge No. 001, any use of chlorine to control slime growths, odors or as an operational control, etc. shall not exceed the limit of 0.05 mg/L (daily maximum) total residual chlorine in the effluent. Sampling is required on a daily grab basis during the chlorination process. Reporting shall be submitted on the DMR's on a monthly basis.

<u>SPECIAL CONDITION 12</u>. During January of each year the Permittee shall submit annual fiscal data regarding sewerage system operations to the Illinois Environmental Protection Agency/Division of Water Pollution Control/Compliance Assurance Section. The Permittee may use any fiscal year period provided the period ends within twelve (12) months of the submission date.

Special Conditions

Submission shall be on forms provided by IEPA titled "Fiscal Report Form For NPDES Permittees".

<u>SPECIAL CONDITION 13</u>. For the duration of this Permit, the Permittee shall determine the quantity of sludge produced by the treatment facility in dry tons or gallons with average percent total solids analysis. The Permittee shall maintain adequate records of the quantities of sludge produced and have said records available for U.S. EPA and IEPA inspection. The Permittee shall submit to the IEPA, at a minimum, a semi-annual summary report of the quantities of sludge generated and disposed of, in units of dry tons or gallons (average total percent solids) by different disposal methods including but not limited to application on farmland, application on reclamation land, landfilling, public distribution, dedicated land disposal, sod farms, storage lagoons or any other specified disposal method. Said reports shall be submitted to the IEPA by January 31 and July 31 of each year reporting the preceding January thru June and July thru December interval of sludge disposal operations.

Duty to Mitigate. The Permittee shall take all reasonable steps to minimize any sludge use or disposal in violation of this Permit.

Sludge monitoring must be conducted according to test procedures approved under 40 CFR 136 unless otherwise specified in 40 CFR 503, unless other test procedures have been specified in this Permit.

Planned Changes. The Permittee shall give notice to the IEPA on the semi-annual report of any changes in sludge use and disposal.

The Permittee shall retain records of all sludge monitoring, and reports required by the Sludge Permit as referenced in Standard Condition 25 for a period of at least five (5) years from the date of this Permit.

If the Permittee monitors any pollutant more frequently than required by this permit or the Sludge Permit, the results of this monitoring shall be included in the reporting of data submitted to the IEPA.

The Permittee shall comply with existing federal regulations governing sewage sludge use or disposal and shall comply with all existing applicable regulations in any jurisdiction in which the sewage sludge is actually used or disposed.

The Permittee shall comply with standards for sewage sludge use or disposal established under section 405(d) of the CWA within the time provided in the regulations that establish the standards for sewage sludge use or disposal even if the permit has not been modified to incorporate the requirement.

The Permittee shall ensure that the applicable requirements in 40 CFR Part 503 are met when the sewage sludge is applied to the land, placed on a surface disposal site, or fired in a sewage sludge incinerator.

Monitoring reports for sludge shall be reported on the form titled "Sludge Management Reports" to the following address:

Illinois Environmental Protection Agency Bureau of Water Compliance Assurance Section Mail Code #19 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

<u>SPECIAL CONDITION 14</u>. This Permit may be modified to include alternative or additional final effluent limitations pursuant to an approved Total Maximum Daily Load (TMDL) Study or upon completion of an alternate Water Quality Study.