Notice No. AAH:11083103.bah

Public Notice Beginning Date: February 23, 2012

Public Notice Ending Date: March 26, 2012

National Pollutant Discharge Elimination System (NPDES)
Permit Program

PUBLIC NOTICE/FACT SHEET

of

Draft Reissued NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By:

Illinois EPA
Division of Water Pollution Control
Permit Section
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276
217/782-0610

Name and Address of Discharger:

City of St. Charles Two East Main Street St. Charles, Illinois 60174-1984 Name and Address of Facility: City of St. Charles - Westside WWTF 3803 Illinois Route 38 St. Charles, Illinois 60175 (Kane County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue a NPDES Permit to discharge into the waters of the state and has prepared a draft Permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. All comments on the draft Permit and requests for hearing must be received by the IEPA by U.S. Mail, carrier mail or hand delivered by the Public Notice Ending Date. Interested persons are invited to submit written comments on the draft Permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. Persons submitting comments and/or requests for public hearing shall also send a copy of such comments or requests to the Permit applicant. The NPDES Permit and notice numbers must appear on each comment page.

The application, engineer's review notes including load limit calculations, Public Notice/Fact Sheet, draft Permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

If written comments or requests indicate a significant degree of public interest in the draft Permit, the permitting authority may, at its discretion, hold a public hearing. Public notice will be given 45 days before any public hearing. Response to comments will be provided when the final Permit is issued. For further information, please call Abel Haile at 217/782-0610.

The following water quality and effluent standards and limitations were applied to the discharge:

Title 35: Environmental Protection, Subtitle C: Water Pollution, Chapter I: Pollution Control Board and the Clean Water Act were applied in determining the applicable standards, limitations and conditions contained in the draft Permit.

The applicant is engaged in treating domestic wastewater for the City of St. Charles – Westside WWTF service area.

The length of the Permit is approximately 5 years.

The main discharge number is 001. The seven day once in ten year low flow (7Q10) of the receiving stream, Mill Creek is 0 cfs.

The design average flow (DAF) for the Existing WWTF is 0.7 million gallons per day (MGD) and the design maximum flow (DMF) for the Existing WWTF is 1.75 MGD. The design average flow (DAF) for the Expanded WWTF is 1.05 million gallons per day (MGD) and the design maximum flow (DMF) for the Expanded WWTF is 2.63 MGD. Treatment consists of screening, activated sludge, settling, ultraviolet disinfection system, and sludge handling facilities.

Public Notice/Fact Sheet -- Page 2 -- NPDES Permit No. IL0026808

This Reissued Permit does not increase the facility's DAF, DMF, concentration limits, and/or load limits.

The antidegradation analysis for the proposed plant expansion was included in the previous permit.

Application is made for the existing discharge(s) which is (are) located in Kane County, Illinois. The following information identifies the discharge point, receiving stream and stream classifications:

Discharge <u>Number</u>	Receiving Stream	<u>Latitude</u>	<u>Longitude</u>	Stream <u>Classification</u>	Integrity <u>Rating</u>
001	Mill Creek	49° 53′ 45″ North	82° 22′ 30" West	General Use	В

To assist you further in identifying the location of the discharge(s) please see the attached map.

The stream segment(s), Waterbody Segment, DTZL-02, receiving the discharge from outfall(s) 001 is not on the 303 (d) list of impaired waters.

The discharge(s) from the facility is (are) proposed to be monitored and limited at all times as follows:

Discharge Number(s) and Name(s): 001 STP Outfall (Existing WWTF)

Load limits computed based on a design average flow (DAF) of 0.70 MGD (design maximum flow (DMF) of 1.75 MGD).

The effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		CONCENTRATION LIMITS mg/L				
<u>Parameter</u>	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly Average	Weekly <u>Average</u>	Daily <u>Maximum</u>	<u>Regulation</u>
CBOD₅	CBOD₅ 58 (146) 117 (292)		10		20	35 IAC 304.120 40 CFR 133.102	
Suspended Solids	uspended Solids 70 (175) 140 (350)		12		24	35 IAC 304.120 40 CFR 133.102	
pH	Shall be in th	Shall be in the range of 6 to 9 Standard Units					35 IAC 304.125
Fecal Coliform	The monthly geometric mean shall not exceed 200 per 100 mL (May through October)						35 IAC 304.121
Ammonia Nitrogen: March	8.8 (22)	22 (55)	29 (72)	1.5	3.8	4.9	35 IAC 355 and 35 IAC 302
April - October	7.0 (18)		18 (44)	1.2		3.0	
NovFeb.	15 (36)		39 (96)	2.5		6.6	
				Monthly Avg. not less than	Weekly Avg. not less than	Daily Minimum	
Dissolved Oxygen March-July				N/A	6.0	5.0	35 IAC 302.206
August-February				5.5	4.0	3.5	

^{*}Load Limits are calculated by using the formula: 8.34 x (Design Average and/or Maximum Flow in MGD) x (Applicable Concentration in mg/L).

Public Notice/Fact Sheet -- Page 3 -- NPDES Permit No. IL0026808

Discharge Number(s) and Name(s): 001 STP Outfall (Expanded WWTF)

Load limits computed based on a design average flow (DAF) of 1.05 MGD (design maximum flow (DMF) of 2.63 MGD).

The effluent of the above discharge(s) shall be monitored and limited at all times as follows:


	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		CONCENTRATION <u>LIMITS mg/L</u>				
<u>Parameter</u>	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	<u>Regulation</u>
CBOD₅	88 (219)		175 (439)	10		20	35 IAC 304.120 40 CFR 133.102
Suspended Solids	nded Solids 105 (263) 210 (526) 12			24	35 IAC 304.120 40 CFR 133.102		
pH	Shall be in th	e range of 6 t	o 9 Standard L	Inits			35 IAC 304.125
Fecal Coliform	The monthly geometric mean shall not exceed 200 per 100 mL (May through October)				100 mL		35 IAC 304.121
Ammonia Nitrogen: March	13 (33)	33 (83)	43 (107)	1.5	3.8	4.9	35 IAC 355 and 35 IAC 302
April - October	11 (26)		26 (66)	1.2		3.0	
NovFeb.	22 (55)		58 (145)	2.5		6.6	
Phosphorus	8.8 (22)			1.0			35 IAC 304.123
Total Nitrogen	Monitor Only						35 IAC 309.146
				Monthly Avg. not less than	Weekly Avg. not less than	Daily Minimum	
Dissolved Oxygen March-July				N/A	6.0	5.0	35 IAC 302.206
August-February		5.5		5.5	4.0	3.5	

^{*}Load Limits are calculated by using the formula: 8.34 x (Design Average and/or Maximum Flow in MGD) x (Applicable Concentration in mg/L).

Public Notice/Fact Sheet -- Page 4 -- NPDES Permit No. IL0026808

This draft Permit also contains the following requirements as special conditions:

- 1. Reopening of this Permit to include different final effluent limitations.
- 2. Operation of the facility by or under the supervision of a certified operator.
- 3. Submission of the operational data in a specified form and at a required frequency at any time during the effective term of this Permit.
- 4. More frequent monitoring requirement without Public Notice in the event of operational, maintenance or other problems resulting in possible effluent deterioration.
- 5. Prohibition against causing or contributing to violations of water quality standards.
- 6. Recording the monitoring results on Discharge Monitoring Report Forms using one such form for each outfall each month and submitting the forms to IEPA each month.
- 7. The provisions of 40 CFR Section 122.41(m) & (n) are applicable and are hereby incorporated by reference.
- 8. Effluent sampling point location.
- 9. Seasonal fecal coliform limits.
- 10. Monitoring for arsenic, barium, cadmium, hexavalent chromium, total chromium, copper, weak acid dissociable cyanide, total cyanide, fluoride, dissolved iron, total iron, lead, manganese, mercury, nickel, oil, phenols, selenium, silver and zinc is required to be conducted semi-annually beginning 3 months from the completion and start of operation of the Expanded WWTF.
- 11. Submission of annual fiscal data.
- 12. Submission of semi annual reports indicating the quantities of sludge generated and disposed.
- 13. Reopening of this Permit to include revised effluent limitations based on a Total Maximum Daily Load (TMDL) or other water quality study.
- 14. Total Nitrogen Monitoring (Expanded WWTF only).
- 15. For the Expanded WWTF the Permittee is required to perform biomonitoring tests in the 18th, 15th, 12th and 9th months prior to the expiration date of the permit, and to submit the results of such tests to the IEPA within one week of receiving the results from the laboratory.
- 16. Notify IEPA upon completion and start of operation of the Expanded WWTF.

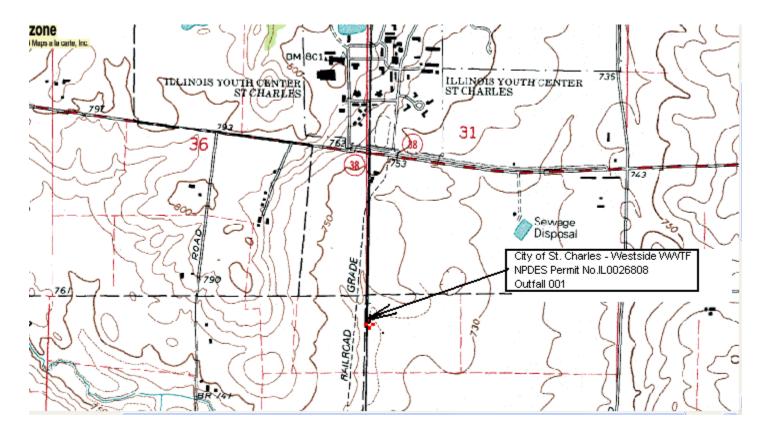

Illinois Environmental Protection Agency

Division of Water Pollution Control

1021 North Grand Avenue East

Post Office Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Reissued (NPDES) Permit

Expiration Date: Issue Date: Effective Date:

Name and Address of Permittee: Facility Name and Address:

City of St. Charles City of St. Charles - Westside WWTF
Two East Main Street 3803 Illinois Route 38
St. Charles, Illinois 60174-1984 St. Charles, Illinois 60175
(Kane County)

Receiving Waters: Mill Creek

In compliance with the provisions of the Illinois Environmental Protection Act, Title 35 of the Ill. Adm. Code, Subtitle C, Chapter I, and the Clean Water Act (CWA), the above-named Permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the standard conditions and attachments herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the Permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Alan Keller, P.E. Manager, Permit Section Division of Water Pollution Control

SAK:AAH:11083103.bah

Special Conditions

NPDES Permit No. IL0026808

Effluent Limitations, Monitoring, and Reporting

FINAL

Discharge Number(s) and Name(s): 001 STP Outfall (Existing WWTF)

Load limits computed based on a design average flow (DAF) of 0.7 MGD (design maximum flow (DMF) of 1.75 MGD).

Excess flow facilities (if applicable) shall not be utilized until the main treatment facility is receiving its maximum practical flow.

From the effective date of this Permit until the completion and start of operation of the Expanded WWTF or the expiration date whichever comes first, the effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		CONCENTRATION <u>LIMITS mg/L</u>					
<u>Parameter</u>	Monthly Average	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly Average	Weekly Average	<u>Daily</u> <u>Maximum</u>	Sample <u>Frequency</u>	Sample <u>Type</u>
Flow (MGD)							Continuous	
CBOD ₅ **	58 (146)		117 (292)	10		20	2 Days/Week	Composite
Suspended Solids	70 (175)		140 (350)	12		24	2 Days/Week	Composite
рН	Shall be in the	he range of 6	to 9 Standard	Units			2 Days/Week	Grab
Fecal Coliform***	The monthly geometric mean shall not exceed 200 per 100 (May through October)				r 100 mL		2 Days/Week	Grab
Ammonia Nitrogen: As (N) March			20 (72)	1.5	3.8	4.9	2 Daya Maak	Composito
April - October	8.8 (22) 7.0 (18)	22 (55)	29 (72) 18 (44)	1.5	3.0	3.0	2 Days/Week 2 Days/Week	Composite Composite
November-February	15 (36)		39 (96)	2.5		6.6	2 Days/Week	Composite
				Monthly Average not less than	Weekly Average not less than	Daily Minimum		
Dissolved Oxygen March-July				N/A	6.0	5.0	2 Days/Week	Grab
August-February				5.5	4.0	3.5	2 Days/Week	Grab

^{*}Load limits based on design maximum flow shall apply only when flow exceeds design average flow.

Flow shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

Fecal Coliform shall be reported on the DMR as a monthly geometric mean. No more than 1 sample or 10% of the samples, whichever is greater during the month shall exceed 400 per 100 ml.

pH shall be reported on the DMR as minimum and maximum value.

Dissolved oxygen shall be reported on the DMR as a minimum value.

^{**}Carbonaceous BOD₅ (CBOD₅) testing shall be in accordance with 40 CFR 136.

^{***}See Special Condition 9.

Special Conditions

NPDES Permit No. IL0026808

Effluent Limitations, Monitoring, and Reporting

FINAL

Discharge Number(s) and Name(s): 001 STP Outfall (Expanded WWTF)

Load limits computed based on a design average flow (DAF) of 1.05 MGD (design maximum flow (DMF) of 2.63 MGD).

Excess flow facilities (if applicable) shall not be utilized until the main treatment facility is receiving its maximum practical flow.

From the completion and start of operation of the Expanded WWTF until the expiration date of this permit, the effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day DAF (DMF)*		CONCENTRATION <u>LIMITS mg/L</u>					
<u>Parameter</u>	Monthly Average	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly <u>Average</u>	Weekly <u>Average</u>	<u>Daily</u> <u>Maximum</u>	Sample <u>Frequency</u>	Sample <u>Type</u>
Flow (MGD)							Continuous	
CBOD ₅ **	88 (219)		175 (439)	10		20	3 Days/Week	Composite
Suspended Solids	105 (263)		210 (526)	12		24	3 Days/Week	Composite
рН	Shall be in the	he range of 6	to 9 Standard	Units			3 Days/Week	Grab
Fecal Coliform***	The monthly geometric mean shall not e (May through October)			exceed 200 pe	r 100 mL		3 Days/Week	Grab
Ammonia Nitrogen: As (N)	40 (00)	00 (00)	40 (407)	4.5	0.0	4.0	0 D AM I-	0
March April - October	13 (33) 11 (26)	33 (83)	43 (107) 26 (66)	1.5 1.2	3.8	4.9 3.0	3 Days/Week 3 Days/Week	Composite
•	+		` '					Composite
November-February	22 (55)		58 (145)	2.5		6.6	3 Days/Week	Composite
Phosphorus	8.8 (22)			1.0			3 Days/Week	Composite
Total Nitrogen****	Monitor Only	/					1 Day/Month	Composite
				Monthly Average not less than	Weekly Average not less than	Daily Minimum		
Dissolved Oxygen March-July				N/A	6.0	5.0	3 Days/Week	Grab
August-February				5.5	4.0	3.5	3 Days/Week	Grab

^{*}Load limits based on design maximum flow shall apply only when flow exceeds design average flow.

Flow shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

Fecal Coliform shall be reported on the DMR as a monthly geometric mean. No more than 1 sample or 10% of the samples, whichever is greater during the month shall exceed 400 per 100 ml.

pH shall be reported on the DMR as minimum and maximum value.

Dissolved oxygen shall be reported on the DMR as a minimum value.

Phosphorus shall be reported on the DMR as a daily maximum value.

^{**}Carbonaceous BOD₅ (CBOD₅) testing shall be in accordance with 40 CFR 136.

^{***}See Special Condition 9.

^{****}See Special Condition 14.

Special Conditions

NPDES Permit No. IL0026808

Influent Monitoring, and Reporting

The influent to the plant shall be monitored as follows:

<u>Parameter</u>	Sample Frequency *	Sample Type
Flow (MGD)	Continuous	
BOD ₅	2 Days /Week	Composite
Suspended Solids	2 Days/Week	Composite

Influent samples shall be taken at a point representative of the influent.

Flow (MGD) shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

 BOD_5 and Suspended Solids shall be reported on the DMR as a monthly average concentration.

^{*} The sample frequency for the Expanded WWTF shall be 3 Days/Week.

Special Conditions

<u>SPECIAL CONDITION 1</u>. This Permit may be modified to include different final effluent limitations or requirements which are consistent with applicable laws, regulations, or judicial orders. The IEPA will public notice the permit modification.

<u>SPECIAL CONDITION 2</u>. The use or operation of this facility shall be by or under the supervision of a Certified Class 2 operator. The Expanded WWTF shall be operated by a Class 1 operator.

<u>SPECIAL CONDITION 3</u>. The IEPA may request in writing submittal of operational information in a specified form and at a required frequency at any time during the effective period of this Permit.

<u>SPECIAL CONDITION 4</u>. The IEPA may request more frequent monitoring by permit modification pursuant to 40 CFR § 122.63 and <u>Without Public Notice</u> in the event of operational, maintenance or other problems resulting in possible effluent deterioration.

<u>SPECIAL CONDITION 5</u>. The effluent, alone or in combination with other sources, shall not cause a violation of any applicable water quality standard outlined in 35 III. Adm. Code 302.

<u>SPECIAL CONDITION 6.</u> The Permittee shall record monitoring results on Discharge Monitoring Report (DMR) Forms using one such form for each outfall each month.

In the event that an outfall does not discharge during a monthly reporting period, the DMR Form shall be submitted with no discharge indicated.

The Permittee may choose to submit electronic DMRs (eDMRs) instead of mailing paper DMRs to the IEPA. More information, including registration information for the eDMR program, can be obtained on the IEPA website, http://www.epa.state.il.us/water/edmr/index.html.

The completed Discharge Monitoring Report forms shall be submitted to IEPA no later than the 25th day of the following month, unless otherwise specified by the permitting authority.

Permittees not using eDMRs shall mail Discharge Monitoring Reports with an original signature to the IEPA at the following address:

Illinois Environmental Protection Agency Division of Water Pollution Control Attention: Compliance Assurance Section, Mail Code # 19 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

SPECIAL CONDITION 7. The provisions of 40 CFR Section 122.41(m) & (n) are applicable and are hereby incorporated by reference.

<u>SPECIAL CONDITION 8.</u> Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

<u>SPECIAL CONDITION 9</u>. Fecal Coliform limits for Discharge Number 001 are effective May thru October. Sampling of Fecal Coliform is only required during this time period.

Any use of chlorine to control slime growths, odors or as an operational control, etc. shall not exceed the limit of 0.05 mg/L (daily maximum) total residual chlorine in the effluent. Sampling is required on a daily grab basis during the chlorination process. Reporting shall be submitted on the DMR's on a monthly basis.

SPECIAL CONDITION 10. For the Expanded WWTF - the Permittee shall conduct semi-annual monitoring of the effluent and report concentrations (in mg/l) of the following listed parameters. Monitoring shall begin three (3) months from the completion and start of operation of the Expanded WWTF. The sample shall be a 24-hour effluent composite except as otherwise specifically provided below and the results shall be submitted on Discharge Monitoring Report Forms to IEPA unless otherwise specified by the IEPA. The parameters to be sampled and the minimum reporting limits to be attained are as follows:

STORET		Minimum
CODE	<u>PARAMETER</u>	reporting limit
01002	Arsenic	0.05 mg/L
01007	Barium	0.5 mg/L
01027	Cadmium	0.001 mg/L
01032	Chromium (hexavalent) (grab)	0.01 mg/L
01034	Chromium (total)	0.05 mg/L
01042	Copper	0.005 mg/L

Special Conditions

00718	Cyanide (weak acid dissociable) (grab)	5.0 ug/L
00720	Cyanide (total) (grab not to exceed 24 hours)	5.0 ug/L
00951	Fluoride	0.1 mg/L
01045	Iron (total)	0.5 mg/L
01046	Iron (Dissolved)	0.5 mg/L
01051	Lead	0.05 mg/L
01055	Manganese	0.5 mg/L
71900	Mercury (grab)**	1.0 ng/L*
01067	Nickel	0.005 mg/L
00556	Oil (hexane soluble or equivalent) (Grab Sample only)	5.0 mg/L
32730	Phenols (grab)	0.005 mg/L
01147	Selenium	0.005 mg/L
01077	Silver (total)	0.003 mg/L
01092	Zinc	0.025 mg/L

Unless otherwise indicated, concentrations refer to the total amount of the constituent present in all phases, whether solid, suspended or dissolved, elemental or combined, including all oxidation states.

<u>SPECIAL CONDITION 11</u>. During January of each year the Permittee shall submit annual fiscal data regarding sewerage system operations to the Illinois Environmental Protection Agency/Division of Water Pollution Control/Compliance Assurance Section. The Permittee may use any fiscal year period provided the period ends within twelve (12) months of the submission date.

Submission shall be on forms provided by IEPA titled "Fiscal Report Form For NPDES Permittees".

SPECIAL CONDITION 12. For the duration of this Permit, the Permittee shall determine the quantity of sludge produced by the treatment facility in dry tons or gallons with average percent total solids analysis. The Permittee shall maintain adequate records of the quantities of sludge produced and have said records available for IEPA inspection. The Permittee shall submit to the IEPA, at a minimum, a semi-annual summary report of the quantities of sludge generated and disposed of, in units of dry tons or gallons (average total percent solids) by different disposal methods including but not limited to application on farmland, application on reclamation land, landfilling, public distribution, dedicated land disposal, sod farms, storage lagoons or any other specified disposal method. Said reports shall be submitted to the IEPA by January 31 and July 31 of each year reporting the preceding January thru June and July thru December interval of sludge disposal operations.

Duty to Mitigate. The Permittee shall take all reasonable steps to minimize any sludge use or disposal in violation of this Permit.

Sludge monitoring must be conducted according to test procedures approved under 40 CFR 136 unless otherwise specified in 40 CFR 503, unless other test procedures have been specified in this Permit.

Planned Changes. The Permittee shall give notice to the IEPA on the semi-annual report of any changes in sludge use and disposal.

The Permittee shall retain records of all sludge monitoring, and reports required by the Sludge Permit as referenced in Standard Condition 23 for a period of at least five (5) years from the date of this Permit.

If the Permittee monitors any pollutant more frequently than required by the Sludge Permit, the results of this monitoring shall be included in the reporting of data submitted to the IEPA.

Monitoring reports for sludge shall be reported on the form titled "Sludge Management Reports" to the following address:

Illinois Environmental Protection Agency Bureau of Water Compliance Assurance Section Mail Code #19 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

<u>SPECIAL CONDITION 13</u>. This Permit may be modified to include alternative or additional final effluent limitations pursuant to an approved Total Maximum Daily Load (TMDL) Study or upon completion of an alternate Water Quality Study.

^{*1.0} ng/L = 1 part per trillion.

^{**}Utilize USEPA Method 1631E and the digestion procedure described in Section 11.1.1.2 of 1631E.

Special Conditions

SPECIAL CONDITION 14. For the Expanded WWTF the Permittee shall design and operate a biological nutrient removal (BNR) treatment process. Monitoring for Total Nitrogen is required to document the actual total nitrogen effluent concentration. The Permittee shall monitor the effluent for total nitrogen once per month. The monitoring shall be a composite sample and the results reported as a daily maximum on the Permittee's Discharge Monitoring Forms.

<u>SPECIAL CONDITION 15</u>. For the Expanded WWTF - the Permittee shall conduct biomonitoring of the effluent from Discharge Number(s) 001.

Biomonitoring

- 1. Acute Toxicity Standard definitive acute toxicity tests shall be run on at least two trophic levels of aquatic species (fish, invertebrate) representative of the aquatic community of the receiving stream. Testing must be consistent with Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms (Fifth Ed.)
 EPA/821-R-02-012. Unless substitute tests are pre-approved; the following tests are required:
 - a. Fish 96 hour static LC₅₀ Bioassay using fathead minnows (Pimephales promelas).
 - b. Invertebrate 48-hour static LC₅₀ Bioassay using Ceriodaphnia.
- 2. Testing Frequency The above tests shall be conducted using 24-hour composite samples unless otherwise authorized by the IEPA. Samples must be collected in the 18th, 15th, 12th, and 9th month prior to the expiration date of this Permit.
- 3. Reporting Results shall be reported according to EPA/821-R-02-012, Section 12, Report Preparation, and shall be submitted to IEPA, Bureau of Water, Compliance Assurance Section within one week of receipt from the laboratory. Reports are due to the IEPA no later than the 16th, 13th, 10th, and 7th month prior to the expiration date of this Permit.
- 4. Toxicity Should a bioassay result in toxicity to >20% of organisms test in the 100% effluent treatment, the IEPA may require, upon notification, six (6) additional rounds of monthly testing on the affected organism(s) to be initiated within 30 days of the toxic bioassay. Results shall be submitted to IEPA within (1) week of becoming available to the Permittee. Should any of the additional bioassays result in toxicity to ≥50% of organisms tested in the 100% effluent treatments, the Permittee may wish to contact the IEPA to request the discontinuance of further sampling at which time the IEPA may require the Permittee to begin the toxicity reduction evaluation and identification as outlined below.
- 5. Toxicity Reduction Evaluation Should the results of the biomonitoring program identify toxicity, the IEPA may require that the Permittee prepare a plan for toxicity reduction evaluation and identification. This plan shall be developed in accordance with Toxicity Reduction Evaluation Guidance for Municipal Wastewater Treatment Plants, EPA/833B-99/002, and shall include an evaluation to determine which chemicals have a potential for being discharged in the plant wastewater, a monitoring program to determine their presence or absence and to identify other compounds which are not being removed by treatment, and other measures as appropriate. The Permittee shall submit to the IEPA its plan for toxicity reduction evaluation within ninety (90) days following notification by the IEPA. The Permittee shall implement the plan within ninety (90) days or other such date as contained in a notification letter received from the IEPA.

The IEPA may modify this Permit during its term to incorporate additional requirements or limitations based on the results of the biomonitoring. In addition, after review of the monitoring results, the IEPA may modify this Permit to include numerical limitations for specific toxic pollutants. Modifications under this condition shall follow public notice and opportunity for hearing.

<u>SPECIAL CONDITION 16</u>. The Permittee shall notify the IEPA in writing once the WWTF expansion has been completed. A letter stating the date that the expansion was completed shall be sent to the following address within fourteen (14) days of the expansion becoming operational:

Illinois Environmental Protection Agency Bureau of Water Compliance Assurance Section, Mail Code #19 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276