

NPDES Permit No. IL0071625  
Notice No. 5992c

Public Notice Beginning Date: **January 31, 2013**

Public Notice Ending Date: **March 4, 2013**

National Pollutant Discharge Elimination System (NPDES)  
Permit Program

Draft Renewed NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By:

Illinois Environmental Protection Agency  
Bureau of Water, Division of Water Pollution Control  
Permit Section  
1021 North Grand Avenue East  
Post Office Box 19276  
Springfield, Illinois 62794-9276  
217/782-0610

Name and Address of Discharger:

KCBX Terminals Company  
3259 East 100<sup>th</sup> Street  
Chicago, Illinois 60617

Name and Address of Facility:

KCBX Terminals Company  
Chicago Transfer Facility  
3259 East 100<sup>th</sup> Street  
Chicago, Illinois, 60617  
(Cook County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue an NPDES permit to discharge into waters of the state and has prepared a draft permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. Comments will be accepted until the Public Notice period ending date indicated above, unless a request for an extension of the original comment period is granted by the Agency. Interested persons are invited to submit written comments on the draft permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. The NPDES permit and notice number(s) must appear on each comment page.

The application, engineer's review notes, Public Notice/Fact Sheet, draft permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

As provided in Section 309.115(a) of the Act, any person may submit a request for a public hearing and if such written comments or requests indicate a significant degree of public interest in the draft permit, the permitting authority may, at its discretion, hold a public hearing. The Agency shall issue public notice of such hearing no less than thirty (30) days prior to the date of such hearing in the manner described by Sections 309.109 through 309.112 of the Act for public notice. The Agency's responses to written and/or oral comments will be provided in the Responsiveness Summary provided when the final permit is issued.

The applicant operates an existing coal storage and river dock facility (SIC 4491). Coal storage and transfer operations result in the discharge of alkaline mine drainage.

This facility has one (1) discharge which is located in Cook County, Illinois. The following information identifies the discharge points, receiving streams, and stream classifications:

<u>Outfall</u>	<u>Receiving Stream</u>	<u>Latitude (North)</u>	<u>Longitude (West)</u>	<u>Stream Classification</u>
001	Calumet River	41°42'22"	87°32'55"	General Use

The stream segment (HAA-01) of Calumet River receiving the discharge from Outfall 001 is on the draft 2010 303(d) list of impaired waters. The following parameters have been identified as the pollutants causing impairment.

<u>Outfall</u>	<u>Pollutant</u>
001	pH, Phosphorus (total), Silver Mercury, PCB, Fecal Coliform

The alkaline mine discharge from this facility shall be monitored and limited at all times as follows:


Outfall: 001:

Discharge Condition	Parameters												
	Total Suspended Solids (3) (mg/l)		Iron (total) (3) (4) (mg/l)		pH (3) (S.U.)	Alkalinity/ Acidity (3)	Sulfate (1) (mg/l)	Chloride (mg/l)	Mn (total) (mg/l)	Hardness (5)	Mercury	Flow (MGD)	Settleable Solids (2) (ml/l)
	30 day average	daily maximum	30 day average	daily maximum									
I	35	70	3.0	6.0	6.5-9.0	Alk.>Acid	1285	500	1.0	Monitor only	Monitor only	Measure When Sampling	-
II	-	-	-	-	6.0-9.0	-	1285	500	-	Monitor only	-	Measure When Sampling	0.5
III	-	-	-	-	6.0-9.0	-	1285	500	-	Monitor only	-	Measure When Sampling	-
IV	35	70	3.0	6.0	6.5-9.0	Alk.>Acid	1285	500	1.0	Monitor only	Monitor only	Measure When Sampling	-

- I Dry weather discharge (base flow or mine pumpage) from the outfall.
- II In accordance with 35 Ill. Adm. Code 406.110(a), any discharge or increase in the volume of a discharge caused by precipitation within any 24-hour period less than or equal to the 10-year, 24 hour precipitation event (or snowmelt or equivalent volume) shall comply with the indicated limitations instead of those in 35 Ill. Adm. Code 406.106(b). The 10-year, 24-hour precipitation event for this area is considered to be 4.47 inches.
- III In accordance with 35 Ill. Adm. Code 406.110(d), any discharge or increase in volume of a discharge caused by precipitation within any 24-hour period greater than the 10-year, 24-hour precipitation event (or snowmelt of equivalent volume) shall comply with the indicated limitations instead of those in 35 Ill. Adm. Code 406.106(b).
- IV Discharges continuing 24 hours after cessation of precipitation event that resulted in discharge. For outfalls which have no allowed mixing, monitoring requirements and permit limitations of Discharge Condition IV are identical to Discharge Condition I to which the outfall discharge has reverted.
- (1) Sulfate water quality standards and effluent limitations determined in accordance with 35 Ill. Adm. Code 302.208(h).
- (2) Settleable solids are monitored only as a result of a discharge due to precipitation events which exceed a predetermined 24-hour duration or snowmelt total. Settleable solids effluent limitations for alkaline mine discharges are contained in 35 Ill. Adm. Code 406.110.
- (3) Effluent standards for mine discharges are contained in 35 Ill. Adm. Code 406.106.
- (4) Discharges from Outfall 001, being approved after July 27, 1987, are subject to a 30-day average effluent limitation for Iron of 3.0 mg/l. Daily maximum effluent concentrations are calculated as twice the 30-day average.
- (5) Hardness monitoring is required to determine the appropriateness of the sulfate permit limit.

To assist you in identifying the location of the discharges, please refer to the attached map. The permit area for this facility is located in Section 7, Township 37 North, Range 15 East, 3rd P.M., Cook County, Illinois.

**KCBX Terminals Company - Chicago Transfer Facility**  
**NPDES No. IL0071625**  
Cook County  
Township 37 North, Range 15 East

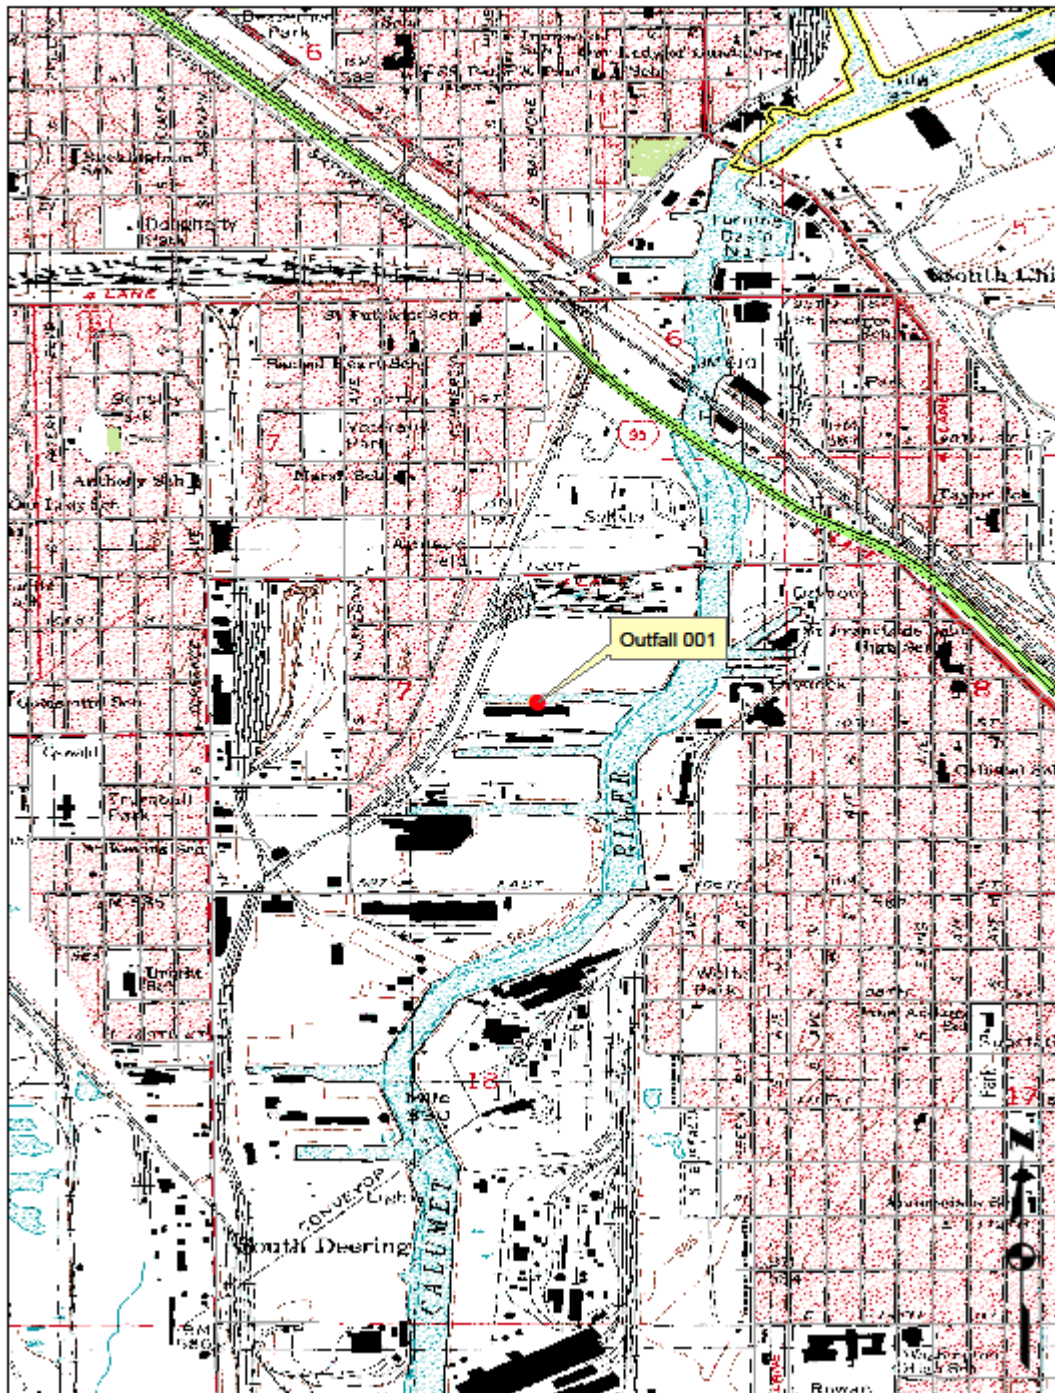

NPDES Permit No. IL0071625

Illinois Environmental Protection Agency

Division of Water Pollution Control

1021 North Grand Avenue, East

P.O. Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Renewed NPDES Permit

Expiration Date:

Issue Date:

Effective Date:

Name and Address of Permittee:

Facility Name and Address:

KCBX Terminals Company  
3259 East 100<sup>th</sup> Street  
Chicago, Illinois 60617

KCBX Terminals Company  
Chicago Transfer Facility  
3259 East 100<sup>th</sup> Street  
Chicago, Illinois 60617  
(Cook County)

Discharge Number and Classification:

Receiving waters

001 Alkaline Mine Drainage

Calumet River

In compliance with the provisions of the Illinois Environmental Protection Act, Subtitle C and/or Subtitle D Rules and Regulations of the Illinois Pollution Control Board, and the Clean Water Act, the above-named permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the standard conditions and attachments herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Larry D. Crislip, Permit Manager  
Mine Pollution Control Program  
Bureau of Water

REM:LDC:IW/cs/5992c/1-24-13

NPDES Coal Mine Permit  
NPDES Permit No. IL0071625  
Effluent Limitations and Monitoring

From the effective date of this Permit until the expiration date, the effluent of the following discharge shall be monitored and limited at all times as follows:

Outfall\*: 001 (Alkaline Mine Drainage)

Discharge Condition	Parameters												
	Total Suspended Solids (mg/l) ***		Iron (total) (mg/l) ***		pH** (S.U.) ***	Alkalinity/ Acidity ***	Sulfate (mg/l) ***	Chloride (mg/l) ***	Mn (total) (mg/l) ***	Hardness ***	Mercury see Special Condition No. 11	Flow (MGD)	Settleable Solids (ml/l)
	30 day average	daily maximum	30 day average	daily maximum									
I	35	70	3.0	6.0	6.5-9.0	Alk.>Acid	1285	500	1.0	Monitor only	Monitor only	Measure When Sampling	-
II	-	-	-	-	6.0-9.0	-	1285	500	-	Monitor only	-	Measure When Sampling	0.5
III	-	-	-	-	6.0-9.0	-	1285	500	-	Monitor only	-	Measure When Sampling	-
IV	35	70	3.0	6.0	6.5-9.0	Alk.>Acid	1285	500	1.0	Monitor only	Monitor only	Measure When Sampling	-

- I Dry weather discharge (base flow or mine pumpage) from the outfall.
- II In accordance with 35 Ill. Adm. Code 406.110(a), any discharge or increase in the volume of a discharge caused by precipitation within any 24-hour period less than or equal to the 10-year, 24-hour precipitation event (or snowmelt or equivalent volume) shall comply with the indicated limitations instead of those in 35 Ill. Adm. Code 406.106(b). The 10-year, 24-hour precipitation event for this area is considered to be 4.47 inches.
- III In accordance with 35 Ill. Adm. Code 406.110(d), any discharge or increase in the volume of a discharge caused by precipitation within any 24-hour period greater than the 10-year, 24-hour precipitation event (or snowmelt of equivalent volume) shall comply with the indicated limitations instead of those in 35 Ill. Adm. Code 406.106(b).
- IV Discharges continuing 24 hours after cessation of precipitation event that resulted in discharge. For outfalls which have no allowed mixing, monitoring requirements and permit limitations of Discharge Condition IV are identical to Discharge Condition I to which the outfall discharge has reverted.

Sampling during all Discharge Conditions shall be performed utilizing the grab sampling method.

\*\*\* There shall be a minimum of nine (9) samples collected during the quarter when the pond is discharging. Of these 9 samples, a minimum of one sample each month shall be taken during either Discharge Condition I or IV should such discharge condition occur. A "no flow" situation is not considered to be a sample of the discharge. In the event that Discharge Conditions II and/or III occur, grab sample of each discharge caused by the above precipitation events (Discharge Conditions II and/or III) shall be taken and analyzed for the parameters identified in the table above during at least 3 separate events each quarter. For quarters in which there are less than 3 such precipitation events resulting in discharges, a grab sample of the discharge shall be required whenever such precipitation event(s) occur(s). Should a sufficient number of discharge events occur during the quarter, the remaining three (3) quarterly samples may be taken during any of the Discharge Conditions described above.

The water quality standards for sulfate and chloride must be met in discharges from the above referenced outfall as well as in the receiving stream.

\* The Permittee is subject to the limitations, and monitoring and reporting requirements of Special Condition No. 9 for the discharges from Outfall 001 and Calumet River receiving such discharges.

\*\* No discharge is allowed from any above referenced permitted outfall during "low flow" or "no flow" conditions in the receiving stream unless such discharge meets the water quality standards of 35 Ill. Adm. Code 302.204 for pH.

NPDES Permit No. IL0071625

Construction Authorization No. 7104-11

C.A. Date: February 2, 2012

Authorization is hereby granted to the above designee to operate a transfer facility described as follows:

A transfer facility for coal and petroleum coke consisting of 47.82 acres located in Section 7, Township 37 North, Range 15 East, 3<sup>rd</sup> P.M. Cook County, Illinois as described in Log No. 7104-11.

The cited permit acreage at this facility has been adjusted from the previous 42.0 acres to the current 47.82 acres based on update mapping as described and depicted in IEPA Log No. 0215-08-A. There is no additional area tributary to the sedimentation basin as there has been no changes to this facility or operation from what was previously approved.

Included on this site are office and maintenance buildings, parking areas and access roads, coal storage areas, railroads, various belt lines for coal transport, barge loading, sedimentation pond, etc.

Surface drainage is controlled by a railroad grade, concrete retaining wall, berms and internal ditches which direct runoff to the sedimentation pond with discharge identified as Outfall 001. The pond was constructed by installing a bulkhead across an adjacent slip as described in Log No. 7136-01. Outfall 001 is classified as alkaline mine drainage and reports to the Calumet River.

The location and receiving stream of the Outfall at this facility is as follows:

Outfall Numbers	Latitude			Longitude			Receiving Waters
	DEG	MIN	SEC	DEG	MIN	SEC	
001	41°	42'	33"	87°	32'	55"	Calumet River

Should this facility cease the handling and transfer of coal related materials, thus no longer being required to maintain an NPDES permit for such activities, all coal related materials shall be removed from the site and either shipped to consumer or properly disposed. In the event that all commercial activity at the facility ceases, the permittee shall execute the abandonment plan described and depicted in IEPA Log No. 7104-11-D entitled "Facility Operations Closure Plan".

This Construction Authorization supersedes and replaces Construction Authorization No. 3495-05 previously issued for the herein permitted facilities and activities.

All water remaining upon abandonment must meet the requirements of 35 Ill. Adm. Code 406.202. For the constituents not covered by Parts 302 or 303, all water remaining upon abandonment must meet the requirements of 35 Ill. Adm. Code 406.106.

This Authorization is issued subject to the following Conditions. If such Conditions require additional or revised facilities, satisfactory engineering plan documents must be submitted to this Agency for review and approval to secure issuance of a Supplemental Authorization to Construct.

1. If any statement or representation is found to be incorrect, this permit may be revoked and the permittee thereupon waives all rights thereunder.
2. The issuance of this permit (a) shall not be considered as in any manner affecting the title of the premises upon which the mine or mine refuse area is to be located; (b) does not release the permittee from any liability for damage to person or property caused by or resulting from the installation, maintenance or operation of the proposed facilities; (c) does not take into consideration the structural stability of any units or parts of the project; and (d) does not release the permittee from compliance with other applicable statutes of the State of Illinois, or with applicable local laws, regulations or ordinances.
3. Final plans, specifications, application and supporting documents as submitted by the person indicated on Page 1 as approved shall constitute part of this permit and are identified in the records of the Illinois Environmental Protection Agency.
4. There shall be no deviations from the approved plans and specifications unless revised plans, specifications and application shall first have been submitted to the Illinois Environmental Protection Agency and a supplemental permit issued.
5. The permit holder shall notify the Environmental Protection Agency (217/782-3637) immediately of an emergency at the mine or mine refuse area which causes or threatens to cause a sudden discharge of contaminants into the waters of Illinois and shall immediately undertake necessary corrective measures as required by 35 Ill. Adm. Code 405.111. (217/782-3637 for calls between the hours of 5:00 p.m. to 8:30 a.m. and on weekends.)

NPDES Permit No. IL0071625

Construction Authorization No. 7104-11

C.A. Date: February 2, 2012

6. The termination of an NPDES discharge monitoring point or cessation of monitoring of an NPDES discharge is not authorized by this Agency until the permittee submits adequate justification to show what alternate treatment is provided or that untreated drainage will meet applicable effluent and water quality standards.
7. This Agency must be informed in writing and an application submitted if drainage, which was previously classified as alkaline (pH greater than 6.0), becomes acid (pH less than 6.0) or ferruginous (base flow with an iron concentration greater than 10 mg/l). The type of drainage reporting to the basin should be reclassified in a manner consistent with the applicable rule of 35 Ill. Adm. Code 406 as amended in R84-29 at 11 Ill. Reg. 12899. The application should discuss the treatment method and demonstrate how the discharge will meet the applicable standards.
8. A permittee has the obligation to add a settling aid, or utilize a mechanical filtration device as approved by the Agency under IEPA Log No. 7136-01, if necessary to meet the suspended solids or settleable solids effluent standards. The selection of a settling aid and the application practice shall be in accordance with a. or b. below
  - a. Alum ( $\text{Al}_2(\text{SO}_4)_3$ ), hydrated lime ( $\text{Ca}(\text{OH})_2$ ), soda ash ( $\text{Na}_2\text{CO}_3$ ), alkaline pit pumpage, acetylene production by-product (tested for impurities), and ground limestone are acceptable settling aids and are hereby permitted for alkaline mine drainage sedimentation ponds.
  - b. Any other settling aids such as commercial flocculents and coagulants are permitted only on prior approval from the Agency. To obtain approval a permittee must demonstrate in writing to the Agency that such use will not cause a violation of the toxic substances standard of 35 Ill. Adm. Code 302.210 or of the appropriate effluent and water quality standards of 35 Ill. Adm. Code parts 302, 304, and 406.
9. Any of the following shall be a violation of the provisions required under 35 Ill. Adm. Code 406.202:
  - a. It is demonstrated that an adverse effect on the environment in and around the receiving stream has occurred or is likely to occur.
  - b. It is demonstrated that the discharge has adversely affected or is likely to adversely affect any public water supply.
  - c. The Agency determines that the permittee is not utilizing Good Mining Practices in accordance with 35 Ill. Adm. Code 406.204 which are fully described in detail in Sections 406.205, 406.206, 406.207 and 406.208 in order to minimize the discharge of total dissolved solids, chloride, sulfate, iron and manganese. To the extent practical, such Good Mining Practices shall be implemented to:
    - i. Stop or minimize water from coming into contact with disturbed areas through the use of diversions and/or runoff controls (Section 406.205).
    - ii. Retention and control within the site of waters exposed to disturbed materials utilizing erosion controls, sedimentation controls, water reuse or recirculation, minimization of exposure to disturbed materials, etc. (Section 406.206).
    - iii. Control and treatment of waters discharged from the site by regulation of flow of discharges and/or routing of discharges to more suitable discharge locations (Section 406.207).
    - iv. Utilized unconventional practices to prevent the production or discharge of waters containing elevated contaminant concentrations such as diversion of groundwater prior to entry into a surface or underground mine, dewatering practices to remove clean water prior to contacting disturbed materials and/or any additional practices demonstrated to be effective in reducing contaminant levels in discharges (Section 406.208).



NPDES Permit No. IL0071625

Special Conditions

**Special Condition No. 1:** No effluent from any mine related facility area under this permit shall, alone or in combination with other sources, cause a violation of any applicable water quality standard as set out in the Illinois Pollution Control Board Rules and Regulations, Subtitle C: Water Pollution.

**Special Condition No. 2:** Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

**Special Condition No. 3:** All periodic monitoring and reporting forms, including Discharge Monitoring Report (DMR) forms, shall be submitted to the Agency according to the schedule outlined in Special Condition No. 4 or 5 below with one (1) copy forwarded to each of the following addresses:

Illinois Environmental Protection Agency  
Division of Water Pollution Control  
1021 North Grand Ave., East  
P.O. Box 19276  
Springfield, IL 62794-9276

Illinois Environmental Protection Agency  
Mine Pollution Control Program  
2309 West Main Street, Suite 116  
Marion, Illinois 62959

Attn: Compliance Assurance Section

**Special Condition No. 4:** Completed Discharge Monitoring Report (DMR) forms and stream monitoring results, shall be retained by the Permittee for a period of three (3) months and shall be mailed and received by the IEPA at the addresses indicated in Special Condition No. 3 above in accordance with the following schedule, unless otherwise specified by the permitting authority.

Period	Received by IEPA
January, February, March	April 15
April, May, June	July 15
July, August, September	October 15
October, November, December	January 15

The Permittee shall record discharge monitoring results on Discharge Monitoring Report forms (DMR's) using one such form for each applicable Discharge Condition each month.

**Special Condition No. 5:** Completed periodic monitoring and reporting, other than DMR's and stream monitoring (i.e., groundwater monitoring, coal combustion waste analysis reports, etc.), shall be retained by the Permittee for a period of three (3) months and shall be mailed and received by the IEPA at the addresses indicated in Special Condition No. 3 above in accordance with the following schedule, unless otherwise specified by the permitting authority.

Period	Received by IEPA
January, February, March	May 1
April, May, June	August 1
July, August, September	November 1
October, November, December	February 1

**Special Condition No. 6:** If an applicable effluent standard or limitation is promulgated under Sections 301(b)(2)(C) and (D), 304(b)(2), and 307(a)(2) of the Clean Water Act and that effluent standard or limitation is more stringent than any effluent limitation in the permit or controls a pollutant not limited in the NPDES Permit, the Agency shall revise or modify the permit in accordance with the more stringent standard or prohibition and shall so notify the permittee.

**Special Condition No. 7:** The permittee shall notify the Agency in writing by certified mail within thirty days of abandonment, cessation, or suspension of active mining for thirty days or more unless caused by a labor dispute. During cessation or suspension of active mining, whether caused by a labor dispute or not, the permittee shall provide whatever interim impoundment, drainage diversion, and wastewater treatment is necessary to avoid violations of the Act or Subtitle D.

NPDES Permit No. IL0071625

Special Conditions

**Special Condition No. 8:** Annual stormwater monitoring is required for all discharges not reporting to a sediment basin until this NPDES permit is terminated and/or approval to cease such monitoring is obtained from the Agency.

- A. Each discharge must be monitored for pH and settleable solids annually.
- B. Analysis of samples must be submitted with second quarter Discharge Monitoring Reports. A map with discharge locations must be included in this submittal.
- C. If discharges can be shown to be similar, a plan may be submitted by November 1 of each year preceding sampling to propose grouping of similar discharges and/or update previously submitted groupings. If updating of a previously submitted plan is not necessary, a written notification to the Agency indicating such is required. Upon approval from the Agency, one representative sample for each group may be submitted.
- D. Stormwater monitoring shall not be required under this Special Condition at such times that weather and/or stream conditions pose a safety risk or hazard to personnel. Such safety risks shall include but not necessarily be limited to collecting samples of runoff from a boat on the Calumet River, collecting samples during periods of persistent lightening, etc.

**Special Condition No. 9:** Sediment Pond Operation and Maintenance (Outfall 001):

- a. For discharges resulting from precipitation events, in addition to the alternate effluent (Discharge Condition Nos. II and III) monitoring requirements, as indicated on the applicable effluent pages of this Permit, discharges from Outfall 001 shall be monitored and reported for Discharge Rate, Sulfate, Chloride and Hardness.
- b. The following sampling and monitoring requirements are applicable to the slip adjacent to the Calumet River which receives discharges from Outfall 001.
  - i. All sampling and monitoring required under 9(b)(ii) below shall be performed during a discharge and monitoring event from the associated outfall.
  - ii. The slip adjacent to the Calumet River shall be monitored and reported quarterly for Chloride, Sulfate and Hardness downstream of the associated outfall. This downstream monitoring shall be performed a sufficient distance downstream of the associated outfall to ensure that complete mixing has occurred. At such time that sufficient information has been collected regarding receiving stream contaminant concentrations the permittee may request a re-evaluation of the monitoring frequency required herein for possible reduction or elimination. For the purpose of re-evaluating the downstream monitoring frequency of the receiving stream, "sufficient information" is defined as a minimum of ten (10) quarterly sampling events.

In the event that downstream monitoring of the receiving waters is eliminated during the term of this permit based on an evaluation of the quarterly data, a minimum of three (3) additional samples analyzed for the parameters identified above must be submitted with the permit renewal application a minimum of 180 days prior to expiration of this permit.

**Special Condition No. 10:** Data collected in accordance with Special Condition No. 9 above will be utilized to evaluate the appropriateness of the effluent limits established in this Permit. Should the Agency's evaluation of this data indicate revised effluent limits are warranted; this permit may be reopened and modified to incorporate more appropriate effluent limitations. This data will also be used for determination of effluent limitations at the time of permit renewal.

**Special Condition No. 11:** Mercury shall be monitored quarterly until a minimum of ten (10) samples have been collected. This monitoring is required only during quarters in which there is a discharge from the Outfall. Samples shall be collected and tested in accordance with USEPA 1631E using the option at Section 11.1.1.2 requiring the heating of samples at 50°C for 6 hours in a BrCl solution in closed vessels. This test method has a Method Detection Limit (MDL) of 0.001 ug/l. The results of such testing must be submitted with the quarterly Discharge Monitoring Reports (DMRs). The Permittee may submit a written request to the Agency to discontinue quarterly Mercury monitoring if the sampling results show no reasonable potential to exceed the Mercury water quality standard.